



Through-beam laser sensor receiver

OJELFPKG/FO/AS



1 pushbutton



Product characteristics		
Type of light		red light
Laser protection class		1
Housing		rectangular
Application		
Function principle		Through-beam sensor
Electrical data		
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 12
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	650
Typ. lifetime	[h]	50000
Outputs		
Electrical design		PNP



Through-beam laser sensor receiver

OJELFPKG/FO/AS

Output function		light-on/dark-on mode; (programmable)	
Max. voltage drop switching output DC	[V]	2.5	
Permanent current rating of switching output DC	[mA]	200	
Switching frequency DC	[Hz]	1200	
Short-circuit protection		yes	
Type of short-circuit protection		pulsed	
Overload protection		yes	
Detection zone			
Transmitter / receiver		receiver	
Range	[m]	< 15	
Range adjustable		yes	
Diameter of the smallest detectable object	[mm]	2	
Operating conditions			
Ambient temperature	[°C]	-10...60	
Protection		IP 67	
Tests / approvals			
EMC		EN 60947-5-2	
Laser protection class		1	
Notes on laser protection	Caution:	laser light	
	laser class:	1	
		EN / IEC60825-1:2007	
		EN / IEC60825-1:2014	
		Complies with 21 CFR 1040 except for deviations pursuant to Laser Notice No. 50, dated June 2007.	
MTTF	[years]	968	
Mechanical data			
Weight	[g]	27.1	
Housing		rectangular	
Dimensions	[mm]	35 x 24 x 11	
Materials		housing: ABS; fixture: diecast zinc; LED window: SEPS; pushbutton: SEPS	
Lens material		glass	
Lens alignment		front lens	
Displays / operating elements			
Display	switching status	1 x LED, yellow	
	operation	1 x LED, green	
	function	1 x LED, red	
Electronic lock		yes	
Accessories			
Items supplied	Basic clip: 1, E20964		
	screws: 2 x M3 x 16		
	spring washers: 2		
	Nuts: 2		




Through-beam laser sensor receiver

OJELFPKG/FO/AS


Remarks	
Remarks	operating voltage "supply class 2" according to cULus
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M8; coding: A



Connection

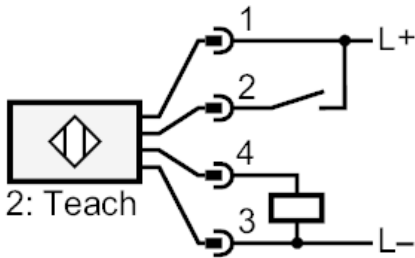

2 Teach



Through-beam laser sensor receiver

OJELFPKG/FO/AS

Diagrams and graphs

excess gain graph

