


# E11228



## Y connection cable

YDOGH080MSS0,15H08STGH040MSS

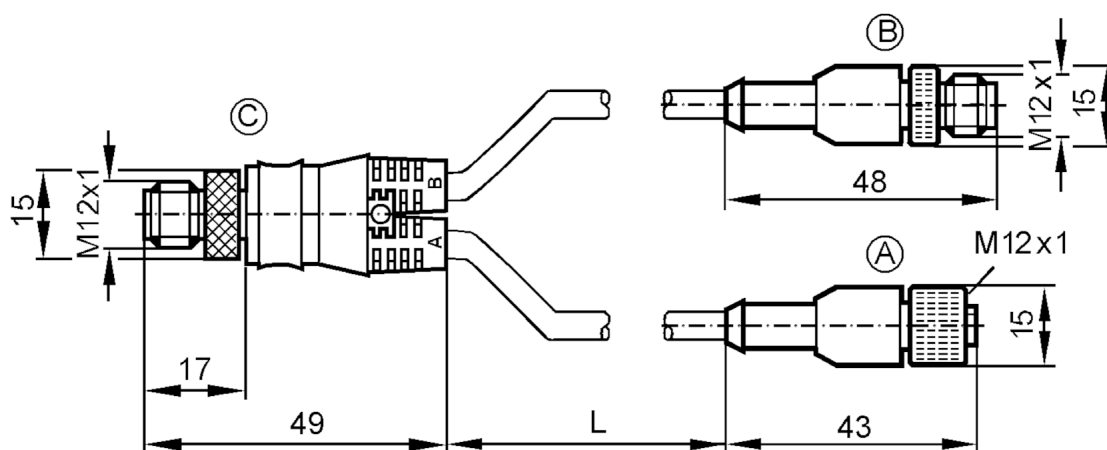

### Application

Special feature

Halogen-free

### Electrical data

Operating voltage

[V]

< 30 AC / < 36 DC

### Operating conditions

Ambient temperature

[°C]

-25...80

Protection

IP 68

### Mechanical data

Weight

[g]

63

Materials

PUR

Moulded-body material

PUR

Material nut

brass, nickel-plated


### Remarks

Pack quantity

1 pcs.

### Electrical connection - socket A


Connector: 1 x M12, straight; coding: A; Moulded body: PUR; Locking: brass, nickel-plated



## Y connection cable

YDOGH080MSS0,15H08STGH040MSS

### Connection

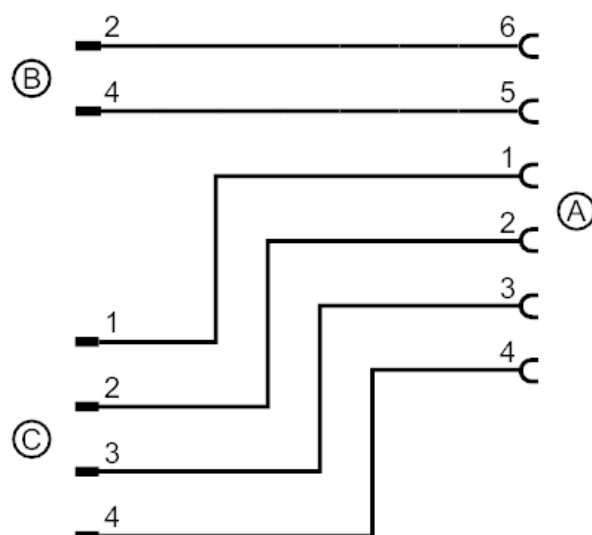

### Electrical connection - plug B

Cable: 0.15 m, PUR, Halogen-free, black, Ø 6.2 mm; 2 x 0.25 mm<sup>2</sup>

Connector: 1 x M12, straight; coding: A; Moulded body: PUR; Locking: brass, nickel-plated



### Electrical connection - plug C

Cable: 0.15 m, PUR, Halogen-free, black, Ø 6.2 mm; 4 x 0.25 mm<sup>2</sup>

Connector: 1 x M12, straight; coding: A; Moulded body: PUR; Locking: brass, nickel-plated

