


# E11658



## Wirable socket

SDOAH040MSSFKPG

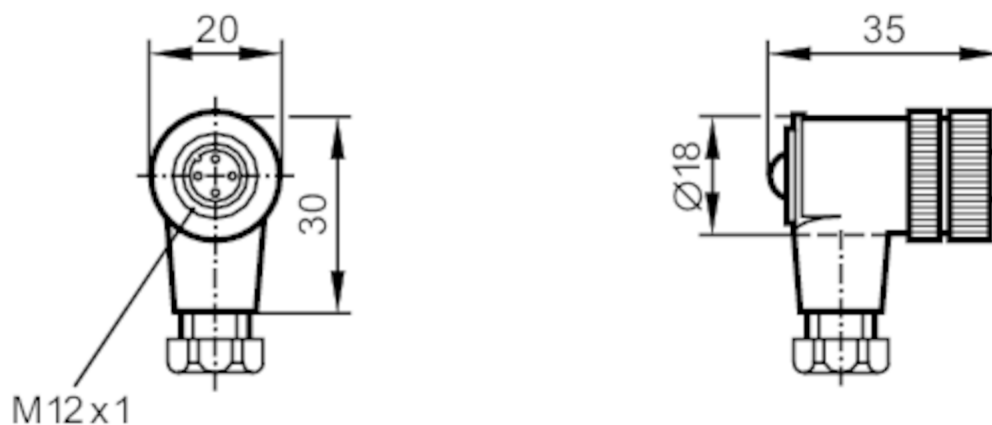

### Application

|                    |                                          |
|--------------------|------------------------------------------|
| Special feature    | Free from silicone; Gold-plated contacts |
| Free from silicone | yes                                      |

### Electrical data

|                         |     |               |
|-------------------------|-----|---------------|
| Operating voltage       | [V] | < 250 AC/DC   |
| Max. current load total | [A] | 4; (...40 °C) |

### Operating conditions

|                     |      |           |
|---------------------|------|-----------|
| Ambient temperature | [°C] | -25...100 |
| Protection          |      | IP 68     |

### Mechanical data

|                       |      |                      |
|-----------------------|------|----------------------|
| Weight                | [g]  | 30.2                 |
| Dimensions            | [mm] | 35 x 20 x 30         |
| Materials             |      | PA                   |
| Moulded-body material |      | PA                   |
| Material nut          |      | brass, nickel-plated |

### Remarks

|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

### Electrical connection

screw terminals: ...0.75 mm<sup>2</sup>; Cable sheath: Ø 6...8 mm


### Electrical connection - socket

Connector: 1 x M12, angled; coding: A; Moulded body: PA; Locking: brass, nickel-plated; Contacts: gold-plated

# E11658

## Wirable socket

SDOAH040MSSFKPG



### Connection

