


# E12315



## Terminating resistor for PROFIBUS DP

ProfiBus Terminat. Resistor

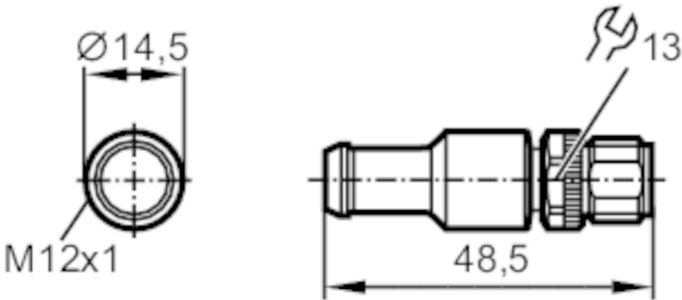

| Application             |      |                                          |
|-------------------------|------|------------------------------------------|
| Special feature         |      | Free from silicone; Gold-plated contacts |
| Free from silicone      |      | yes                                      |
| Electrical data         |      |                                          |
| Max. current load total | [A]  | 4; (...40 °C)                            |
| Operating conditions    |      |                                          |
| Ambient temperature     | [°C] | -25...85                                 |
| Protection              |      | IP 67                                    |
| Mechanical data         |      |                                          |
| Weight                  | [g]  | 9.9                                      |
| Dimensions              | [mm] | 14.5 x 14.5 x 48.5                       |
| Materials               |      | PUR                                      |
| Moulded-body material   |      | PUR                                      |
| Material nut            |      | brass, nickel-plated                     |
| Remarks                 |      |                                          |
| Pack quantity           |      | 1 pcs.                                   |

# E12315



## Terminating resistor for PROFIBUS DP

ProfiBus Terminat. Resistor

### Electrical connection - plug

Connector: 1 x M12, straight; coding: B; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6 Nm



### Connection

