

E12383



Connection cable

VDOGH080MSS0010K08STGH080MSS




Application	
Special feature	Screened cable
Electrical data	
Operating voltage	[V] < 30 AC / < 36 DC
Operating conditions	
Ambient temperature	[°C] -25...80
Protection	IP 68
Mechanical data	
Weight	[g] 571
Materials	PUR
Moulded-body material	PUR
Material nut	brass, nickel-plated
Remarks	
Pack quantity	1 pcs.

Connection cable

VDOGH080MSS0010K08STGH080MSS

Electrical connection - plug


Connector: 1 x M12, straight; coding: A; Moulded body: PUR; Locking: brass, nickel-plated; Tightening torque: 0.7...0.9 Nm;
Shielded connection cable: screen connected



Electrical connection

Cable: 10 m, PUR, black, Ø 6.8 mm, shielded; 8 x 0.25 mm²

Connection

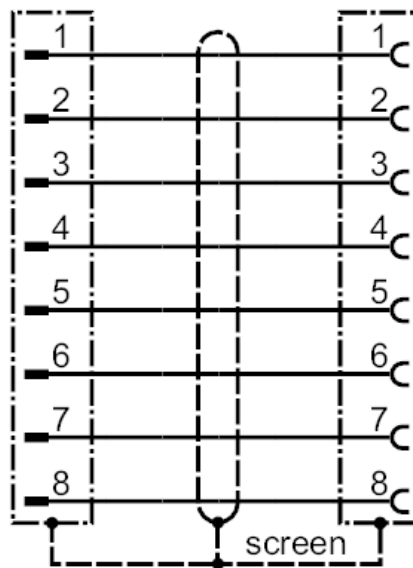

Electrical connection - socket

Connector: 1 x M12, straight; coding: A; Moulded body: PUR; Locking: brass, nickel-plated; Tightening torque: 0.7...0.9 Nm;
Shielded connection cable: screen connected

