




Wirable socket

SDOGF030MSSFKPG

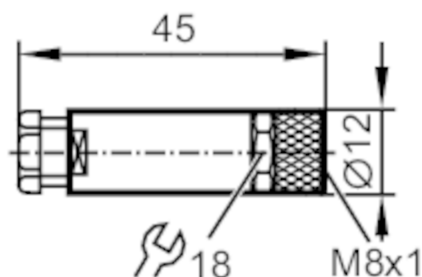

Application

Special feature	Gold-plated contacts
-----------------	----------------------

Electrical data

Operating voltage	[V]	< 30 AC/DC
-------------------	-----	------------

Outputs

Electrical design	PNP
-------------------	-----

Operating conditions

Ambient temperature	[°C]	-40...85
Protection		IP 67

Mechanical data

Weight	[g]	10.7
Dimensions	[mm]	12 x 12 x 45
Materials		PBT; PA
Moulded-body material		PBT / PA
Material nut		brass, nickel-plated

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

screw terminals: 0.14...0.5 mm²; Cable sheath: Ø 3.5...5 mm


Electrical connection - socket

Connector: 1 x M8, straight; coding: A; Moulded body: PBT / PA; Locking: brass, nickel-plated; Contacts: gold-plated

E12463

Wirable socket

SDOGF030MSSFKPG



Connection

