


Wirable AMP socket

SDOGV060--AFKCR

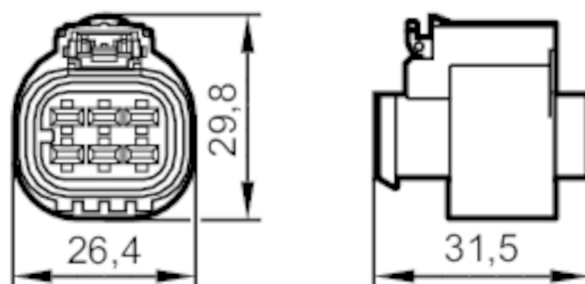

Electrical data

Operating voltage	[V]	12...24 DC
-------------------	-----	------------

Operating conditions

Ambient temperature	[°C]	-40...100
Ambient temperature (moving)	[°C]	-40...100
Protection		IP 67; (mating connector plugged in)

Mechanical data

Weight	[g]	14
Dimensions	[mm]	29.8 x 26.4 x 31.5
Materials		socket housing: PBT; Contacts: nickel-plated

Accessories

Items supplied	cover plug: 6
	sealing of the individual cores: 2 x 0,25 m ²
	sealing of the individual cores: 4 x 0,50 m ²
	Crimp contacts supplied with the unit

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

terminals: 2 x 0.5 mm²

E12582




Wirable AMP socket

SDOGV060--AFKCR

4 x 0.25 mm²

Electrical connection - socket

Connection

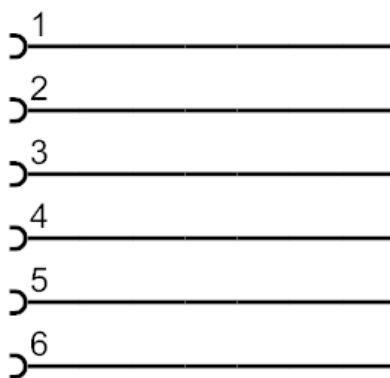

Connector: 1 x AMP connector, straight; Contacts: nickel-plated