


E12632



Ethernet connection cable

VSTGX080MSS0005K08STGP080--S

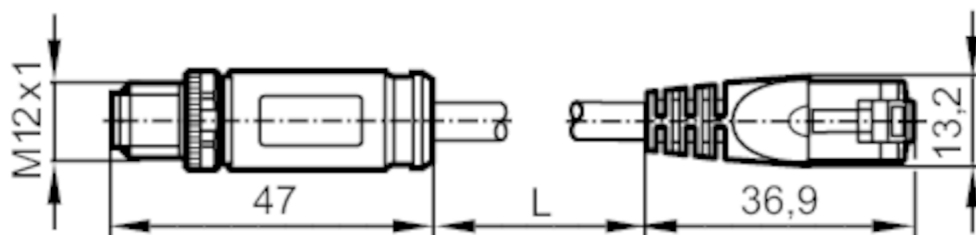

Application

Special feature	Screened cable; Drag chain suitability
Design	Ethernet cable, X-coded

Operating conditions

Ambient temperature	[°C]	-40...85
Protection	IP 67; IP 20; (M12 plug / RJ45 plug)	

Mechanical data

Weight	[g]	231.9
Materials	PUR; PA	
Moulded-body material	PA	
Material nut	diecast zinc, nickel-plated	
Drag chain suitability	yes	
Drag chain suitability	bending radius for flexible use	min. 8 x cable diameter
	bending radius for fixed installation	min. 4 x cable diameter
	maximum permissible acceleration	4 m/s ²
	travel speed	4 m/s
	bending cycles	> 1 Mio.
	torsional strain	± 180 °/m

Remarks

Pack quantity	1 pcs.
---------------	--------

E12632



Ethernet connection cable

VSTGX080MSS0005K08STGP080--S

Electrical connection - plug


Connector: 1 x M12, straight; coding: X; Moulded body: PA; Locking: diecast zinc, nickel-plated; Tightening torque: 0.5 Nm



Electrical connection

Cable: 5 m, PUR, green, Ø 6.2 mm, shielded; 8 x 0.14 mm²

Connection

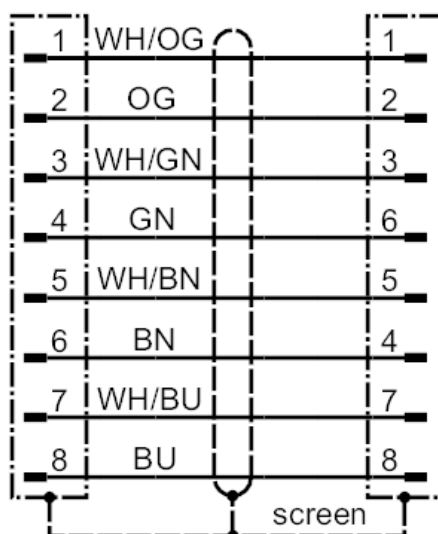

Electrical connection - plug

Connector: 1 x RJ45, straight; Moulded body: PA

