


E12775



Wirable plug

SSTGB030ZDSFKPG

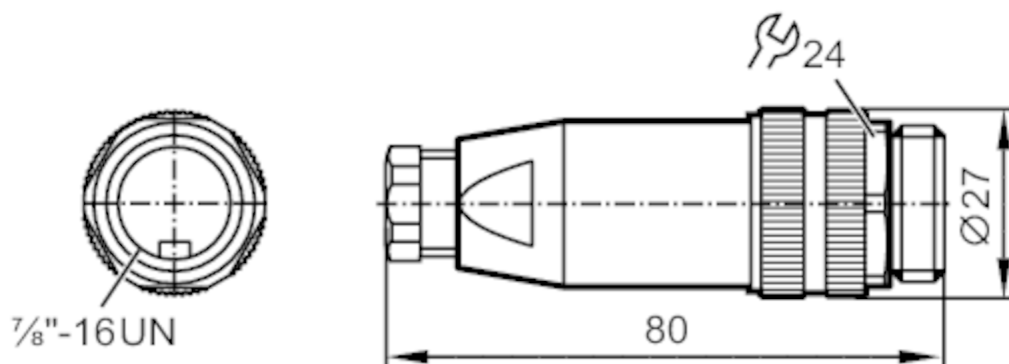

Application

Special feature	Gold-plated contacts
-----------------	----------------------

Electrical data

Operating voltage	[V]	< 300 AC/DC
Protection class		II
Max. current load total	[A]	12

Operating conditions

Ambient temperature	[°C]	-25...85
Protection		IP 67

Mechanical data

Weight	[g]	51.9
Moulded-body material		PBT
Material nut		diecast zinc, nickel-plated

Remarks

Remarks	pin 1 leading
Pack quantity	1 pcs.

Electrical connection

screw terminals: ...1.5 mm²; Cable sheath: Ø 6...8 mm; AWG 16


Electrical connection - plug

Connector: 1 x 7/8", straight; Moulded body: PBT; Locking: diecast zinc, nickel-plated; Contacts: gold-plated

E12775

Wirable plug

SSTGB030ZDSFKPG



Connection

