




T-splitter

ZDO2B050ZDS0000-00STGB050ZDS

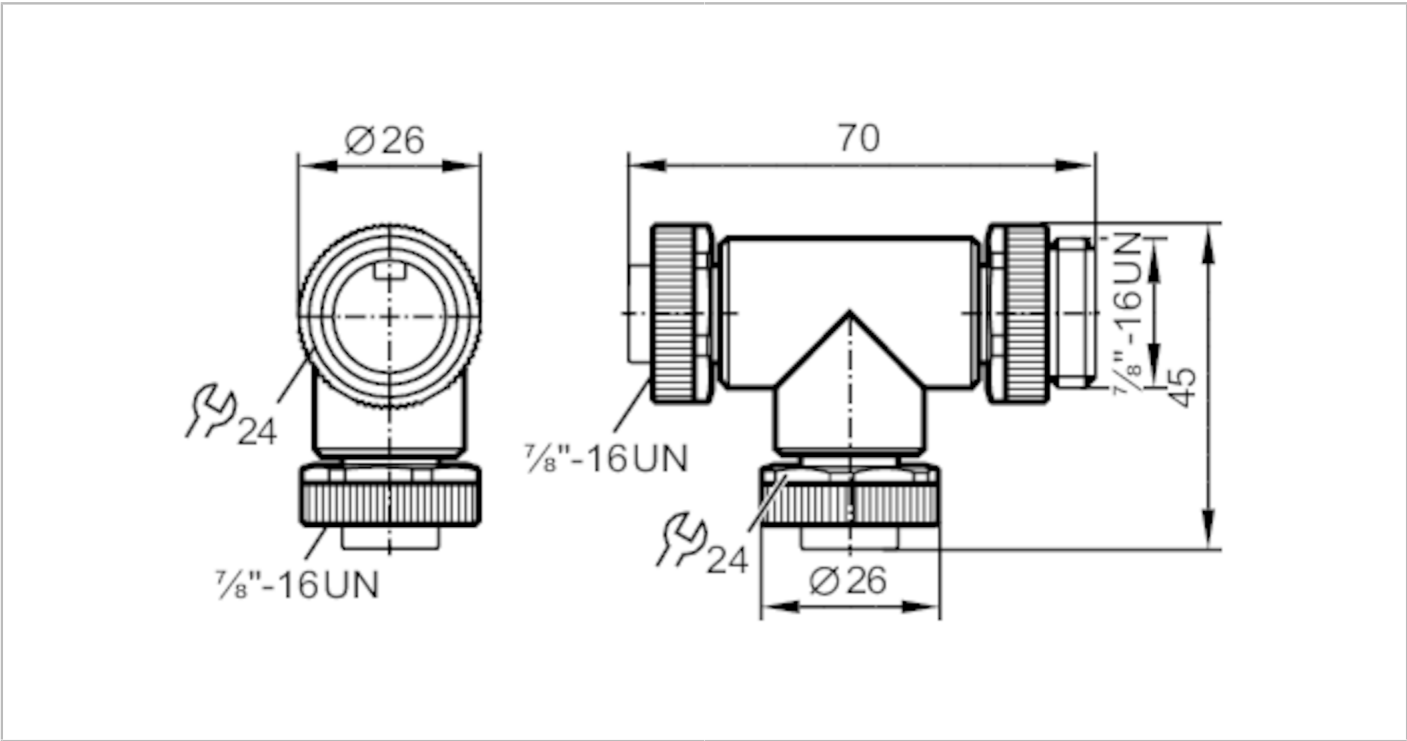

| Application                    |      |                      |
|--------------------------------|------|----------------------|
| Special feature                |      | Gold-plated contacts |
| Electrical data                |      |                      |
| Operating voltage              | [V]  | < 400 AC/DC          |
| Protection class               |      | II                   |
| Max. current load total        | [A]  | 8                    |
| Operating conditions           |      |                      |
| Ambient temperature            | [°C] | -30...85             |
| Protection                     |      | IP 68                |
| Mechanical data                |      |                      |
| Weight                         | [g]  | 102.65               |
| Material nut                   |      | diecast zinc         |
| Remarks                        |      |                      |
| Pack quantity                  |      | 1 pcs.               |
| Electrical connection - plug A |      |                      |

Connector: 7/8"; Locking: diecast zinc; Contacts: gold-plated



# E12778



## T-splitter

ZDO2B050ZDS0000-00STGB050ZDS

### Electrical connection

#### Connection

#### Electrical connection - socket B

Connector: 7/8"; Locking: diecast zinc; Contacts: gold-plated



#### Electrical connection - socket C

Connector: 7/8"; Locking: diecast zinc; Contacts: gold-plated

