


E12784



Connection cable

VDOGH080MSS00,1H04STGH040MSS

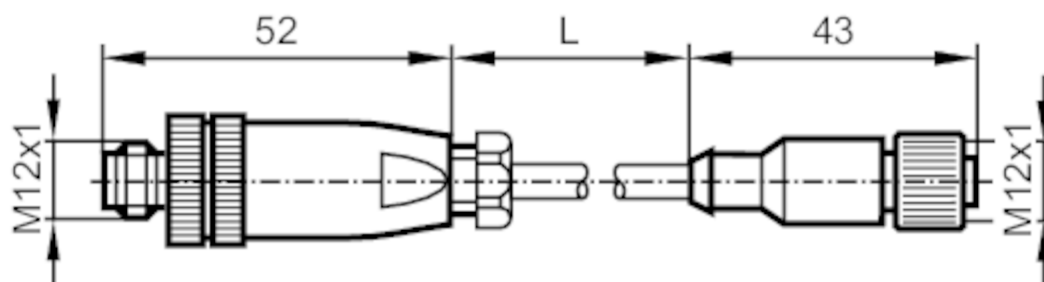

Application

Special feature	Free from silicone; Halogen-free; Gold-plated contacts
Application	use on safety light grids and PROFIsafe IO-Link modules
Free from silicone	yes

Electrical data

Operating voltage	[V]	< 36 DC
Protection class		II
Max. current load total	[A]	2; (...40 °C)

Operating conditions

Protection	IP 67
------------	-------

Mechanical data

Weight	[g]	47
Moulded-body material		PA / TPU
Material nut		brass, nickel-plated

Remarks

Pack quantity	1 pcs.
---------------	--------

E12784



Connection cable

VDOGH080MSS00,1H04STGH040MSS

Electrical connection - plug


Connector: 1 x M12, straight; coding: A; Moulded body: PA, black; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...0.7 Nm



Electrical connection

Cable: 0.1 m, PUR, Halogen-free, black, Ø 6.6 mm; 8 x 0.25 mm²

Connection

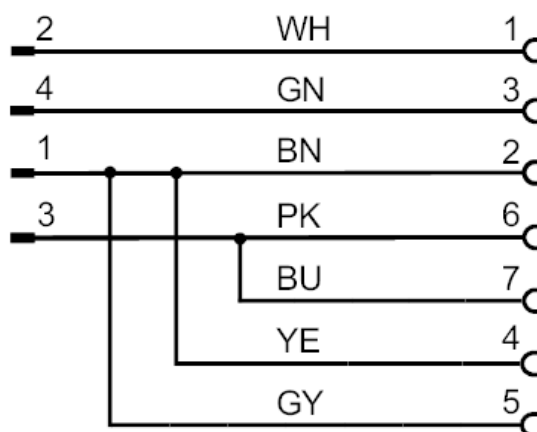

Electrical connection - socket

Connector: 1 x M12, straight; coding: A; Moulded body: TPU, black; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm

