


# E12789



## H splitter

ZDO3E050MSS0000-00STGE050MSS

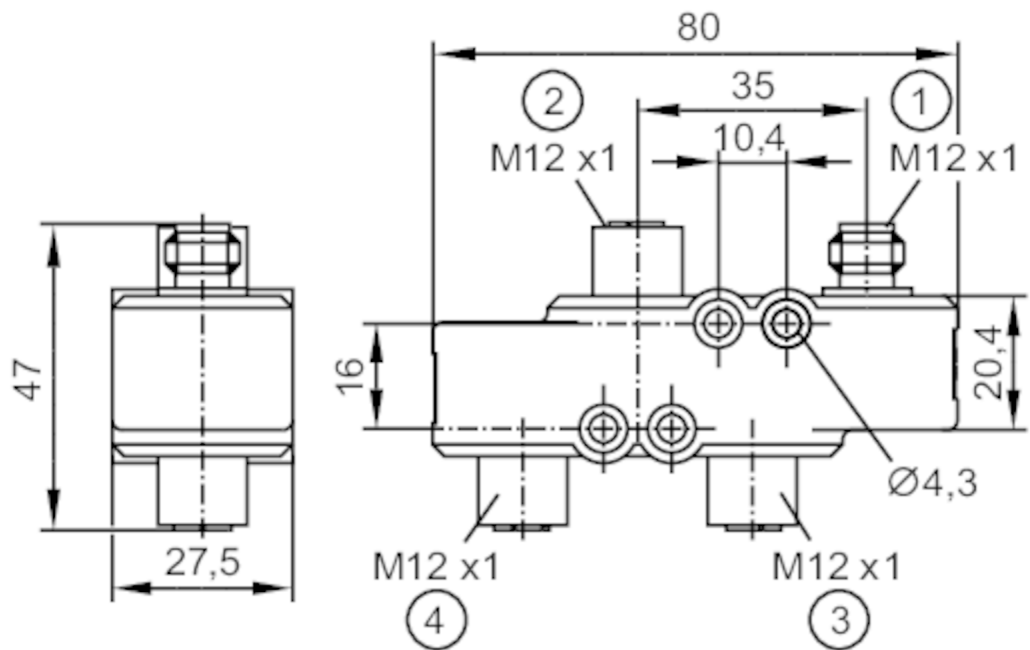

### Application

Special feature

Gold-plated contacts

### Electrical data

Operating voltage

[V]

< 63 DC

Protection class

III

Max. current load total

[A]

16; (40 °C)

### Operating conditions

Ambient temperature

[°C]

-40...85

Protection

IP 65

### Mechanical data

Weight

[g]

130.7

Moulded-body material

PBT

Material nut

brass, nickel-plated

Sealing material

HNBR

### Accessories

Items supplied

labels: 2

### Remarks

Pack quantity

1 pcs.

# E12789



## H splitter


ZDO3E050MSS0000-00STGE050MSS

### Electrical connection - plug

Connector: 1 x M12; coding: L; Moulded body: PBT, black; Locking: brass, nickel-plated; Contacts: gold-plated



### Connection

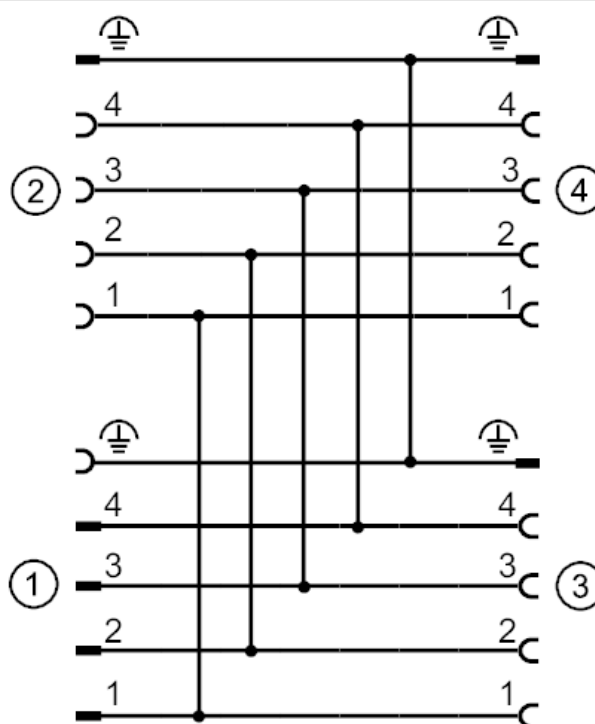

### Electrical connection - socket

Connector: 3 x M12; coding: L; Moulded body: PBT, black; Locking: brass, nickel-plated; Sealing: HNBR; Contacts: gold-plated

