




Grinding protection for the installation of Aseptoflex
Vario welding adapters

SEALING EDGE GRINDING PROTECTION

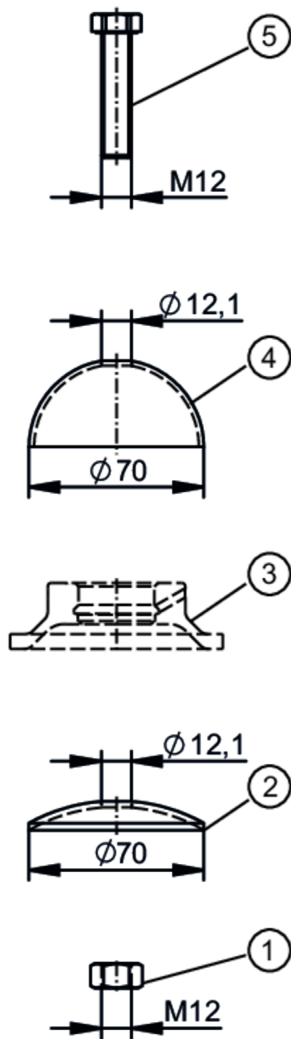

- 1 hexagon nuts DIN 934-M12
- 2 half shell Ø 70mm
- 3 welding adapter not supplied
- 4 hemispherical cap Ø 70mm
- 5 socket head cap screw ISO 4017-M12x50

Application	
Design	Schleifschutz für die Dichtkante von Aseptoflex Vario Einschweißadaptern E30528
Application	Schleifen von eingeschweißten Adaptern
Mechanical data	
Weight [g]	0.001
Materials	VA; stainless steel (1.4301 / 304)
Remarks	
Pack quantity	3 pcs.