




Welding adapter for process sensors

WELDING ASEPTO ADAPT D38/G1

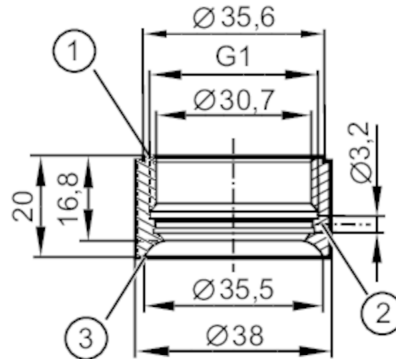

- 1 Aseptoflex Vario
- 2 Leakage port
- 3 sealing area

Application	
Design	with leakage port, for installation of LDL20x
Pressure rating [bar]	50
Note on pressure rating	for the connection sensor - adapter
Tests / approvals	
Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Pressure Equipment Directive EAC	The adapter is intended for use in devices, machines and installations that do not fall under the categories of the technical rule TR CU 032/2013.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.
Mechanical data	
Weight [g]	113.8
Materials (wetted parts)	stainless steel (1.4435 / 316L) ; surface characteristics : Ra<0,4 / Rz 4
Sensor connection	G 1 Aseptoflex Vario
Process connection	welding adapter Ø 38 mm
Remarks	
Pack quantity	1 pcs.