




Welding adapter for process sensors

WELDING ADAPT D85 G1 V4A 3A

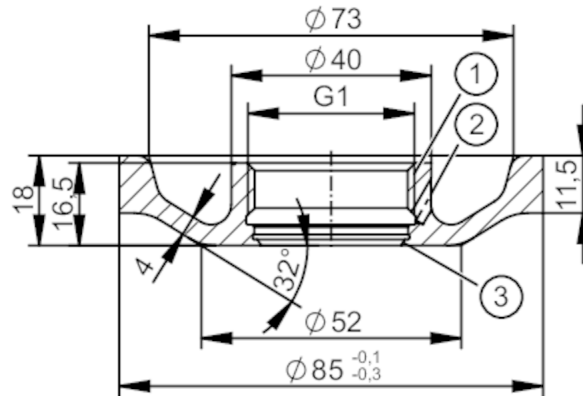

- | | | |
|---|--------------------|------------------|
| 1 | G1 Internal thread | Aseptoflex Vario |
| 2 | Leakage port | |
| 3 | sealing area | |



EC 1935/2004 EHEDG Certified



Application

Design	with leakage port
Installation	for thick wall thicknesses and for unfavourable welding conditions; for tank bottom and wall
Pressure rating [bar]	16
Note on pressure rating	for the connection sensor - adapter

Tests / approvals

Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Pressure Equipment Directive EAC	The adapter is intended for use in devices, machines and installations that do not fall under the categories of the technical rule TR CU 032/2013.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.

Mechanical data

Weight	[g]	366.6
Materials (wetted parts)		stainless steel (1.4435 / 316L) ; surface characteristics : Ra<0,4 / R
Sensor connection		G 1 Aseptoflex Vario
Process connection		welding adapter Ø 85 mm
Sealing		Gasket

Accessories

Items supplied	O-ring: 1 x 24 x 2, EPDM, E30054
Accessories (optional)	O-ring: 1 x 24 x 2, FKM, E30123

Remarks

Pack quantity	1 pcs.
---------------	--------