


Process adapter Varivent

ADAPT IFM-VARIV TYP N (D=68)3A



- 1 Aseptoflex Vario
- 2 Leakage port
- 3 sealing area

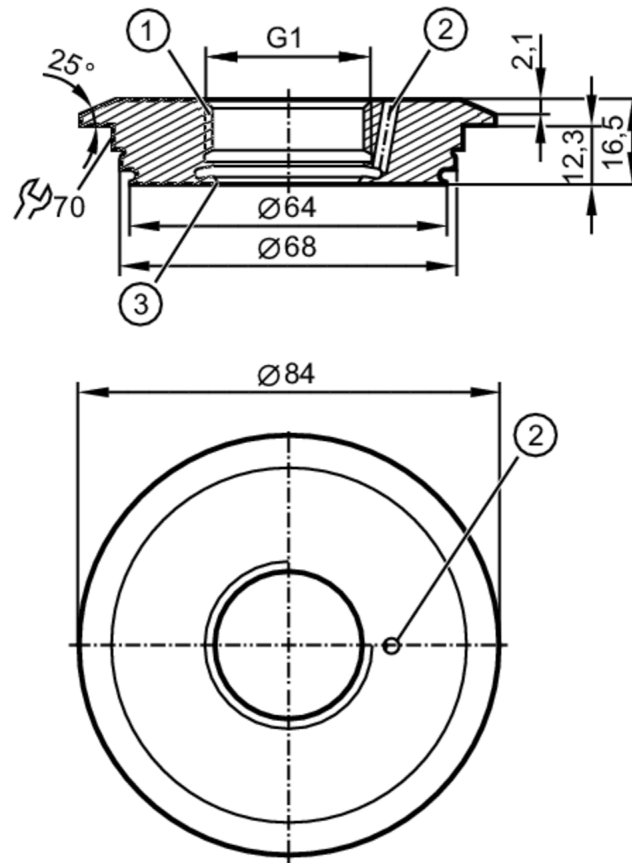

EC 1935/2004 EHEDG Certified



Application		
Design		with leakage port
Pressure rating	[bar]	25
Tests / approvals		
Pressure Equipment Directive		A possible classification to PED depends on the application and has to be carried out by the user / operator.
Pressure Equipment Directive EAC		The adapter is intended for use in devices, machines and installations that do not fall under the categories of the technical rule TR CU 032/2013.
Safety instructions		The compatibility between medium and product material has to be checked in all applications.
Mechanical data		
Weight	[g]	471
Materials (wetted parts)		stainless steel (1.4435 / 316L) ; surface characteristics : Ra<0,4 / Rz 4
Sensor connection		G 1 Aseptoflex Vario
Process connection		Varivent Form N, DN40...DN150 (1,5...6"), Ø 68 mm
Sealing		Gasket
Hygienic equipment class to DIN 11866		H4

E33229



Process adapter Varivent

ADAPT IFM-VARIV TYP N (D=68)3A

Accessories	
Items supplied	O-ring: 1 x 24 x 2, EPDM, FDA compliant, E30054
Accessories (optional)	O-ring: 1 x 24 x 2, FKM, FDA compliant, E30123
	sealing ring: 1, PEEK, FDA compliant, E30124
Remarks	
Pack quantity	1 pcs.