


Screw-in adapter for process sensors

ADAPT G1/2-ASEPTOFLEX



- 1 Aseptoflex thread
- 2 sealing area Aseptoflex adapter
- 3 Dichtkante sensor

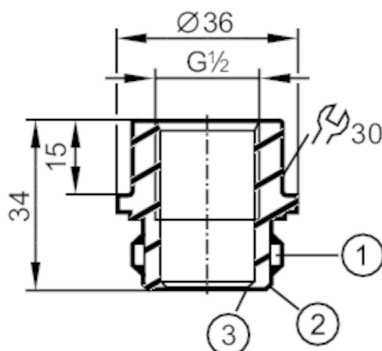

EC 1935/2004 FCM FDA

Application

Pressure rating [bar] 50

Tests / approvals

Pressure Equipment Directive

A possible classification to PED depends on the application and has to be carried out by the user / operator.

Pressure Equipment Directive EAC

The adapter is intended for use in devices, machines and installations that do not fall under the categories of the technical rule TR CU 032/2013.

Safety instructions

The compatibility between medium and product material has to be checked in all applications.

Mechanical data

Weight [g] 187

Materials stainless steel (1.4435 / 316L)

Sensor connection G 1/2 sealing cone

Process connection threaded connection Aseptoflex

Surface characteristics Ra/Rz of the wetted parts 0.4 / 4

Remarks

Pack quantity 1 pcs.