


Process adapter for SMS pipe fitting

ADAPT IFM-SMS DN40/1.5"

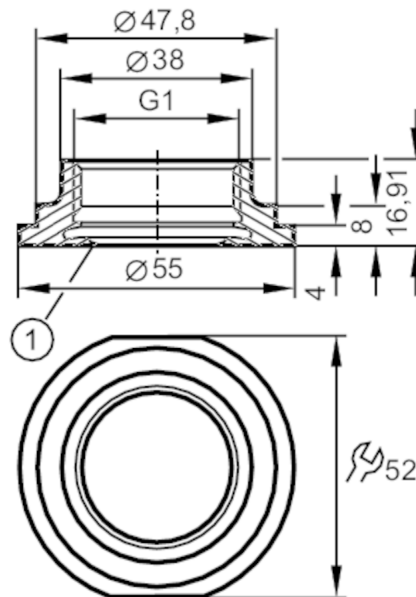

1 sealing edge

EC 1935/2004 FCM 

Application

Pressure rating	[bar]	40
-----------------	-------	----

Tests / approvals

Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Pressure Equipment Directive EAC	The adapter is intended for use in devices, machines and installations that do not fall under the categories of the technical rule TR CU 032/2013.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.

Mechanical data

Weight	[g]	139.5
Materials (wetted parts)	stainless steel (1.4435 / 316L) ; surface characteristics : Ra<0,4 / Rz 4	
Sensor connection	G 1 Aseptoflex Vario	
Process connection	SMS pipe fitting DN40 (1,5")	
Sealing	metal to metal	
Hygienic equipment class to DIN 11866	H4	

Remarks

Pack quantity	1 pcs.
---------------	--------