


Process adapter for small volumetric flow quantities

FLOW ADAPT SI

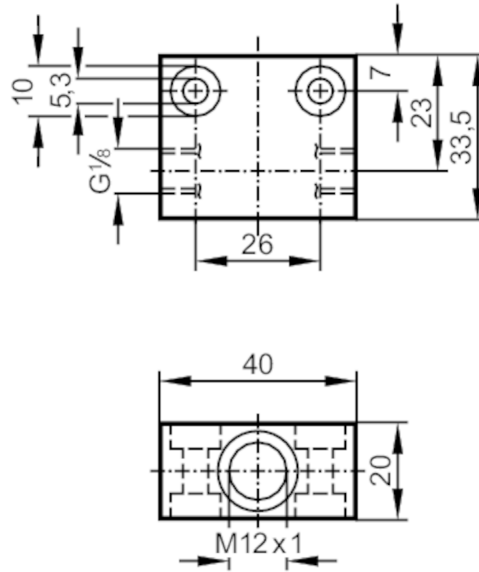

Application	
Design	for flow sensors and flow monitors
Application	for industrial applications
Installation	via internal G1/8A male thread, any mounting position
Media	liquids and gases
Medium temperature [°C]	0...80; (Temperature gradient: 1 K/min)
Pressure rating [bar]	300
Measuring/setting range	
Flow range [ml/min]	2...100
Tests / approvals	
Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Pressure Equipment Directive EAC	The adapter is intended for use in devices, machines and installations that do not fall under the categories of the technical rule TR CU 032/2013.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.
Mechanical data	
Weight [g]	156.5
Dimensions [mm]	M12 x 1
Thread designation	M12 x 1
Materials	stainless steel (1.4404 / 316L)
Sensor connection	M12 x 1
Process connection	G 1/8
Accessories	
Items supplied	sealings: 1, U-seal
Accessories (optional)	Adapter: ≤ 30 bar, E40101 Adapter: ≤ 300 bar, E40236
Remarks	
Remarks	Can only be used in combination with the flow sensor's relative operating mode.

E40129



Process adapter for small volumetric flow quantities

FLOW ADAPT SI

Pack quantity

1 pcs.