
E40227

Mounting adapter for flow sensors

ADAPT /SM/1/VICTAULIC



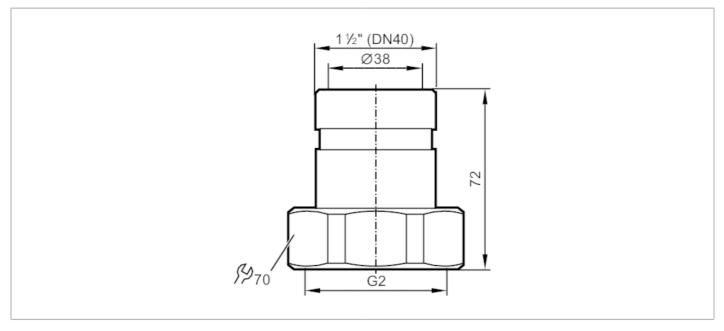

| Application | | |
|----------------------------------|-------|--|
| Design | | for flow sensors Typ SM2, SM9 |
| Pressure rating | [bar] | 16 |
| Tests / approvals | | |
| Pressure Equipment Directive | | A possible classification to PED depends on the application and has to be carried out by the user / operator. |
| Pressure Equipment Directive EAC | | The adapter is intended for use in devices, machines and installations that do not fall under the categories of the technical rule TR CU 032/2013. |
| Safety instructions | | The compatibility between medium and product material has to be checked in all applications. |
| Mechanical data | | |
| Weight | [g] | 1439.5 |
| Materials | | Adapter: stainless steel (1.4571/316Ti); Gasket: Centellen 55 x 43 x 3 mm |
| Sensor connection | | G 2 |
| Process connection | | Victaulic 1,5" |
| Accessories | | |
| Items supplied | | O-rings: 2 |
| Remarks | | |
| Pack quantity | | 2 pcs. |