




Process adapter Varivent

ADAPT G1/2-VARIVENT D50 3A

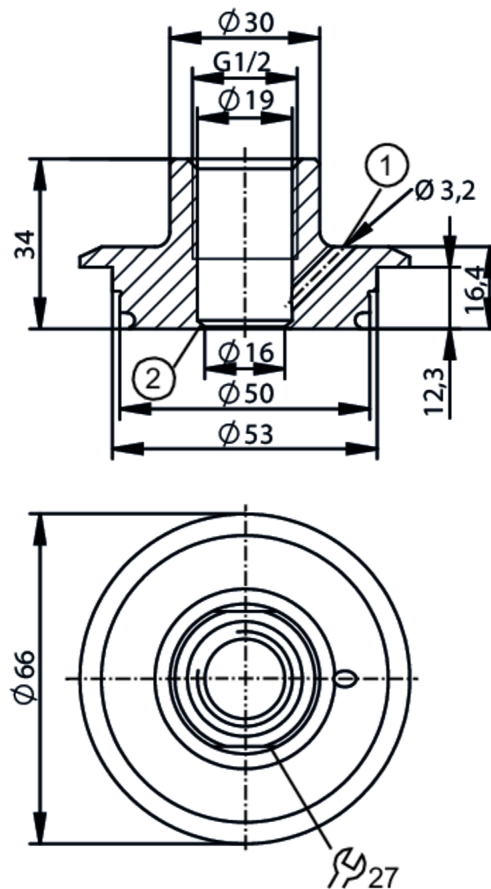

- 1 Leakage port
2 sealing edge



EC 1935/2004 EHEDG Certified FCM FDA

Application

Design	with leakage port
Pressure rating [bar]	25
Note on pressure rating	for the connection sensor - adapter

Tests / approvals

Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Pressure Equipment Directive EAC	The adapter is intended for use in devices, machines and installations that do not fall under the categories of the technical rule TR CU 032/2013.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.

Mechanical data

Weight [g]	390.2
Materials	stainless steel (1.4435 / 316L); surface characteristics Ra>0,4 / Rz 4
Sensor connection	G 1/2 sealing cone
Process connection	Varivent Form F, DN25 (1"), Ø 50 mm
Hygienic equipment class to DIN 11866	H4

E43034



Process adapter Varivent

ADAPT G1/2-VARIVENT D50 3A

Remarks	
Pack quantity	1 pcs.