




Process adapter Tri-Clamp

ADAPT G1/2-DN20 DIN32676-A

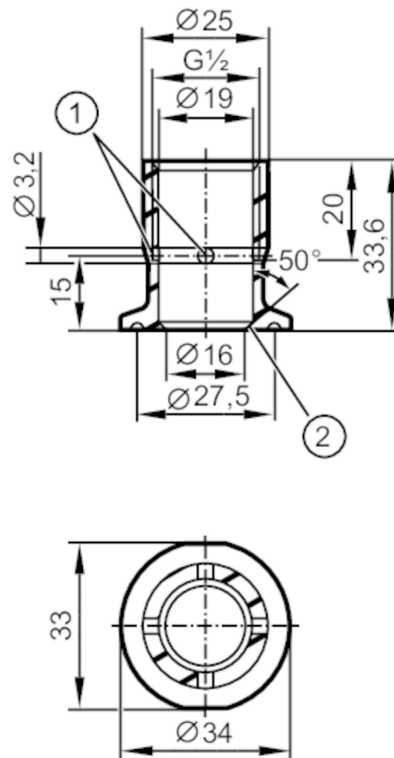

- 1 Leakage port
2 sealing edge



EC 1935/2004 EHEDG Certified



Application

Design	with leakage port
Pressure rating [bar]	25
Note on pressure rating	for the connection sensor - adapter

Tests / approvals

Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Pressure Equipment Directive EAC	The adapter is intended for use in devices, machines and installations that do not fall under the categories of the technical rule TR CU 032/2013.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.

Mechanical data

Weight [g]	117.6
Dimensions [mm]	Ø 34
Materials	stainless steel (1.4435 / 316L)
Sensor connection	G 1/2 sealing cone
Process connection	Clamp DN20 DIN 32676 (ISO 2852)
Surface characteristics Ra/Rz of the wetted parts	0.4 / 4

Remarks

Pack quantity	1 pcs.
---------------	--------