


Screw-in adapter for process sensors

ADAPT G1/2-CLAMP DIN32676/DN1,5

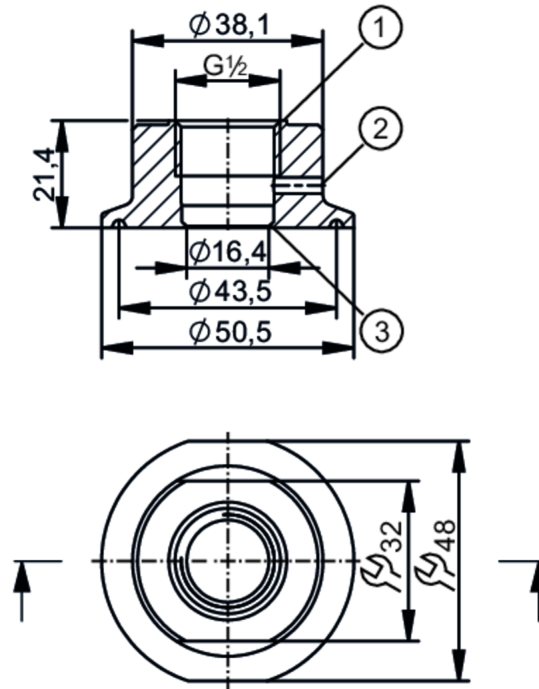

- 1: sealing area
- 2: Leakage port
- 3: sealing edge

Application

Design	with leakage port
Pressure rating [bar]	150
Note on pressure rating	take into account the pressure resistance of the bracket and the seal used for clamp connection

Tests / approvals

Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Pressure Equipment Directive EAC	The adapter is intended for use in devices, machines and installations that do not fall under the categories of the technical rule TR CU 032/2013.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.

Mechanical data

Weight [g]	199
Materials	stainless steel (1.4435 / 316L)
Sensor connection	G 1/2
Process connection	Clamp DN25...DN40 (1...1,5") DIN 32676 (ISO 2852)

Remarks

Pack quantity	1 pcs.
---------------	--------