


AS-Interface flat cable insulation displacement connector

FCE Splitter ye/bk ProcessL

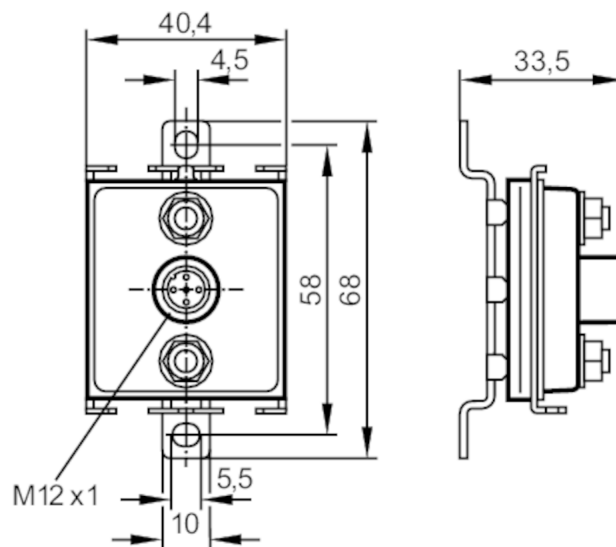


Application		
Design	AS-i / 24 V	
Electrical data		
Protection class	III	
Max. current load total	[A]	4; (AS-i: 2 A; AUX: 2 A)
Operating conditions		
Ambient temperature	[°C]	-30...80
Protection	IP 67; IP 68; IP 69K	
Tests / approvals		
EMC	EN 61000-6-2	
Mechanical data		
Weight	[g]	112.3
Materials	metal parts: stainless steel (1.4404 / 316L); rubber gasket for contact pins: FPM; O-ring: EPDM	
Tightening torque	[Nm]	2.5; (lock nuts)
Accessories		
Accessories (optional)	Torque wrench:, E70390	
Remarks		
Pack quantity	1 pcs.	
Electrical connection - socket		
Connector: 1 x M12; coding: A; Tightening torque: 1.2...1.4 Nm		

E70354



AS-Interface flat cable insulation displacement connector

FCE Splitter ye/bk ProcessL



Connection	
1	AS-i +
2	0 V
3	AS-i -
4	+ 24 V
5	n. c.