


Y-splitter

ZDO2H020MSS0000-00STGH040MSS-

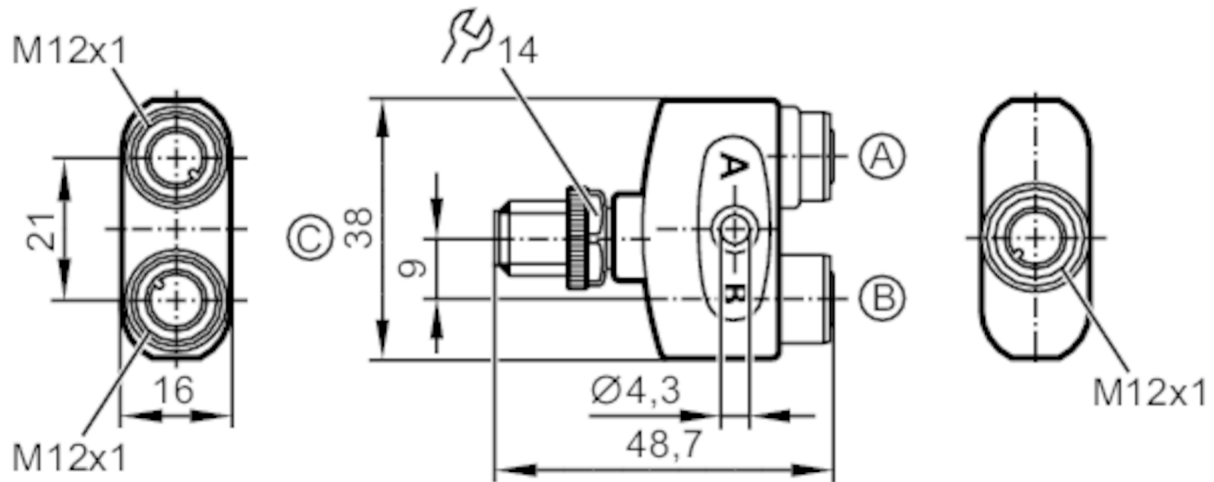

Application

Special feature	Free from silicone; Gold-plated contacts
Free from silicone	yes

Electrical data

Operating voltage	[V]	< 250 AC / < 300 DC
Protection class		II
Max. current load per module/slot	[A]	4
Max. current load total	[A]	4

Operating conditions

Ambient temperature	[°C]	-25...90
Storage temperature	[°C]	-25...55
Storage humidity	[%]	10...100
Other climatic conditions for storage according to stated class		1K22/ DIN 60721-3-1
Protection		IP 65; IP 67; IP 68; IP 69K

Mechanical data

Weight	[g]	35.8
Materials		housing: PA orange; Sealing: FKM
Material nut		brass, nickel-plated

Remarks


Pack quantity	1 pcs.
---------------	--------

Y-splitter

ZDO2H020MSS0000-00STGH040MSS-

Electrical connection

Connection

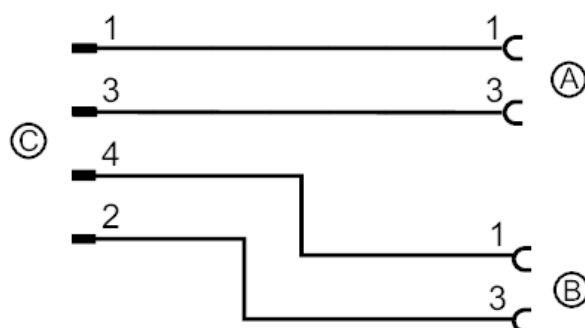

Electrical connection - plug

Connector: 1 x M12; coding: A; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm



Electrical connection - socket

Connector: 2 x M12; coding: A; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm

