


EVC718



Connection cable

VDOGH040MSP0001H04STGH040MSP

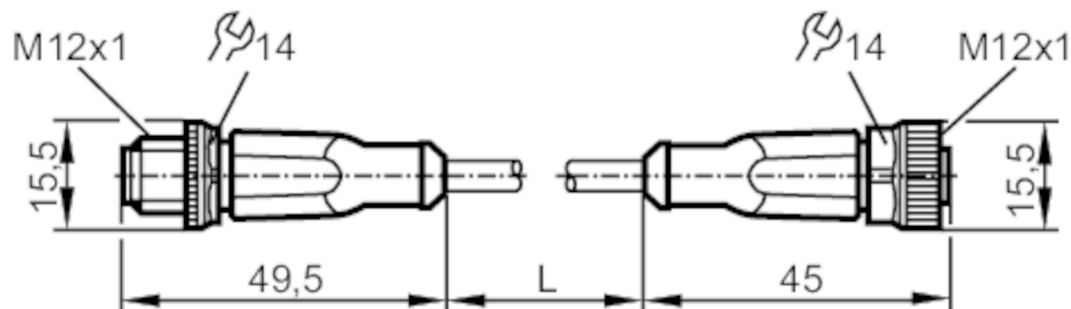


Application		
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 250 AC / < 300 DC
Protection class		II
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-25...90
Ambient temperature (moving)	[°C]	-25...90
Protection		IP 65; IP 67; IP 68; IP 69K
Mechanical data		
Weight	[g]	102.6
Materials		housing: TPU orange; Sealing: FKM
Material nut		brass / brass
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 1 m, PUR, Halogen-free, black, Ø 6.2 mm; 4 x 1.00 mm ² (32 x Ø 0.2 mm)		
Electrical connection - socket		
Connector: 1 x M12, straight; Locking: , brass, nickel-plated; Kontakte: gold-plated; Tightening torque: 0.6...1.5		



Connection cable

VDOGH040MSP0001H04STGH040MSP



Electrical connection - plug

Connector: 1 x M12, straight; Locking: , brass, nickel-plated; Kontakte: gold-plated; Tightening torque: 0.6...1.5



Connection

