


# IF5930



## Inductive sensor

IFK3004-BPKG/US-104

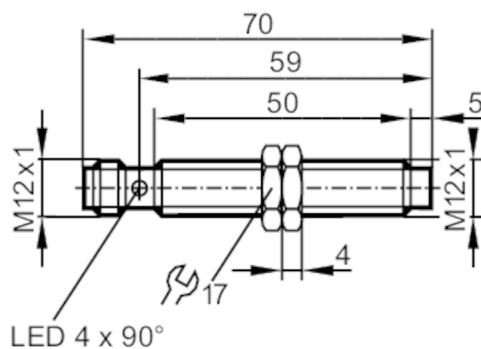

### Product characteristics

|                    |                  |
|--------------------|------------------|
| Electrical design  | PNP              |
| Output function    | normally open    |
| Sensing range [mm] | 4                |
| Housing            | threaded type    |
| Dimensions [mm]    | M12 x 1 / L = 70 |

### Application

|                 |                      |
|-----------------|----------------------|
| Special feature | Gold-plated contacts |
|-----------------|----------------------|

### Electrical data

|                             |            |
|-----------------------------|------------|
| Operating voltage [V]       | 10...30 DC |
| Current consumption [mA]    | < 10       |
| Protection class            | II         |
| Reverse polarity protection | yes        |

### Outputs

|                                                      |               |
|------------------------------------------------------|---------------|
| Electrical design                                    | PNP           |
| Output function                                      | normally open |
| Max. voltage drop switching output DC [V]            | 2.5           |
| Permanent current rating of switching output DC [mA] | 200           |
| Switching frequency DC [Hz]                          | 1400          |
| Short-circuit protection                             | yes           |
| Overload protection                                  | yes           |

### Detection zone

|                            |          |
|----------------------------|----------|
| Sensing range [mm]         | 4        |
| Real sensing range Sr [mm] | 4 ± 10 % |
| Operating distance [mm]    | 0...3.24 |

### Accuracy / deviations

|                              |          |
|------------------------------|----------|
| Hysteresis [% of Sr]         | 3...15   |
| Switch point drift [% of Sr] | -10...10 |

### Operating conditions

|                          |          |
|--------------------------|----------|
| Ambient temperature [°C] | -25...80 |
|--------------------------|----------|

# IF5930



## Inductive sensor

IFK3004-BPKG/US-104

|            |       |
|------------|-------|
| Protection | IP 67 |
|------------|-------|

### Tests / approvals

|                            |              |         |
|----------------------------|--------------|---------|
| EMC                        | EN 60947-5-2 |         |
|                            | EN 55011     | class B |
| MTTF [years]               | 1965         |         |
| Embedded software included | yes          |         |

### Mechanical data

|                    |                                                                                                               |  |
|--------------------|---------------------------------------------------------------------------------------------------------------|--|
| Weight [g]         | 29.6                                                                                                          |  |
| Housing            | threaded type                                                                                                 |  |
| Mounting           | non-flush mountable                                                                                           |  |
| Dimensions [mm]    | M12 x 1 / L = 70                                                                                              |  |
| Thread designation | M12 x 1                                                                                                       |  |
| Materials          | housing: brass white bronze coated; sensing face: PBT orange; LED window: PEI; lock nuts: white bronze coated |  |

### Displays / operating elements

|         |                  |                 |
|---------|------------------|-----------------|
| Display | switching status | 4 x LED, yellow |
|---------|------------------|-----------------|

### Accessories

|                |              |
|----------------|--------------|
| Items supplied | lock nuts: 2 |
|----------------|--------------|

### Remarks

|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

### Electrical connection - plug

Connector: 1 x M12; coding: A; Contacts: gold-plated



### Connection

