


Inductive sensor

IFKC007-ASKG/M/V4A/1M/WH

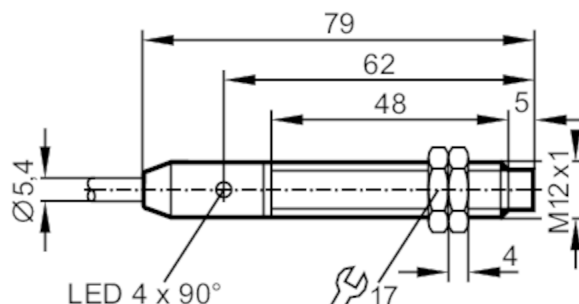

Product characteristics

Electrical design	PNP/NPN
Output function	normally open
Sensing range [mm]	7
Housing	threaded type
Dimensions [mm]	M12 x 1 / L = 79

Application

Special feature	Increased sensing range; Optical setting aid
Application	regular cleaning processes

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	12; (24 V)
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP/NPN
Output function	normally open
Max. voltage drop switching output DC [V]	2.8
Minimum load current [mA]	2; (only in 2-wire operation)
Max. leakage current [mA]	0.5; (only in 2-wire operation)
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	700
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes

Detection zone

Sensing range [mm]	7
Real sensing range S_r [mm]	$7 \pm 10 \%$
Operating distance [mm]	0...5.7



Inductive sensor

IFKC007-ASKG/M/V4A/1M/WH

Increased sensing range		yes	
Accuracy / deviations			
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3	
Hysteresis [% of Sr]		3...15	
Switch point drift [% of Sr]		-10...10	
Operating conditions			
Ambient temperature [°C]		0...100	
Protection		IP 68; IP 69K	
Tests / approvals			
EMC		EN 61000-4-2 ESD	4 kV CD / 8 kV AD
		EN 61000-4-3 HF radiated	10 V/m
		EN 61000-4-4 Burst	2 kV
		EN 61000-4-6 HF conducted	10 V
		EN 55011	class B
MTTF [years]		1287	
UL approval		Ta	0...40 °C
		Enclosure type	Type 1
		power supply	Limited Voltage/Current
		File number UL	E174191
Mechanical data			
Weight [g]		86.5	
Housing		threaded type	
Mounting		non-flush mountable	
Dimensions [mm]		M12 x 1 / L = 79	
Thread designation		M12 x 1	
Materials		stainless steel (1.4404 / 316L); sensing face: PEEK	
Displays / operating elements			
Display		switching status	1 x LED, yellow
		setting aid	1 x LED, red
Optical setting aid		yes	
Accessories			
Items supplied		lock nuts: 2	
Remarks			
Remarks		suitable for PLC type 1 according to IEC 61131-2	
Pack quantity		1 pcs.	

IFT249



Inductive sensor

IFKC007-ASKG/M/V4A/1M/WH

Electrical connection

Cable: 1 m, PVC; 3 x 0.34 mm²

Connection

