


IGA2008-ABOA/BS-201-A



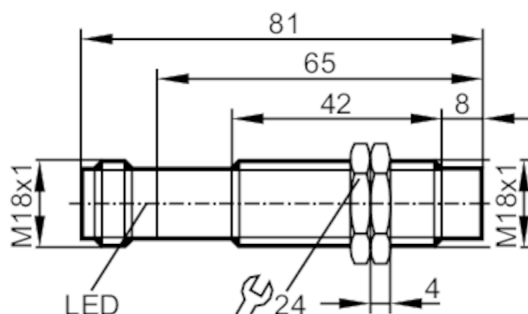

Inductive sensor

IGA2008-ABOA/BS-201-A


Hysteresis	[% of Sr]	1...15
Switch point drift	[% of Sr]	-10...10
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	604
Mechanical data		
Weight	[g]	59.9
Housing		threaded type
Mounting		non-flush mountable
Dimensions	[mm]	M18 x 1 / L = 81
Thread designation		M18 x 1
Materials		brass white bronze coated; PBT natural
Displays / operating elements		
Display	switching status	1 x LED, yellow
Electrical connection		
Required protection		miniature fuse to IEC60127-2 sheet 1; ≤ 2 A; fast acting
Accessories		
Items supplied		lock nuts: 2
Remarks		
Remarks		Recommendation: Check the safe functioning of the unit after a short circuit.
Pack quantity		1 pcs.

Inductive sensor

IGA2008-ABOA/BS-201-A

Electrical connection - plug

Connector: 1 x M18; coding: A

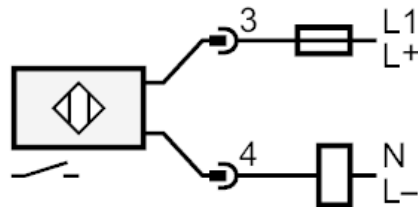

Note miniature fuse to IEC60127-2 sheet 1 ≤ 2 A fast acting