


IG5246



Inductive sensor

IGB3005-APOG

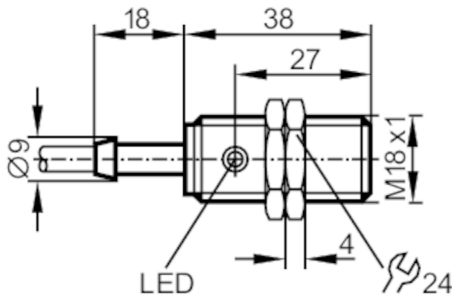

Product characteristics

Electrical design	PNP
Output function	normally closed
Sensing range [mm]	5
Housing	threaded type
Dimensions [mm]	M18 x 1 / L = 38

Electrical data

Operating voltage [V]	18...36 DC
Current consumption [mA]	15; (24 V)
Protection class	II
Reverse polarity protection	no

Outputs

Electrical design	PNP
Output function	normally closed
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	125; (150 (...50 °C))
Switching frequency DC [Hz]	500
Short-circuit protection	no
Overload protection	no

Detection zone

Sensing range [mm]	5
Real sensing range Sr [mm]	5 ± 10 %
Operating distance [mm]	0...4.05

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2
Hysteresis [% of Sr]	1...15
Switch point drift [% of Sr]	-10...10

Operating conditions

Ambient temperature [°C]	-25...80
Protection	IP 67

IG5246



Inductive sensor

IGB3005-APOG

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B
MTTF [years]		3077

Mechanical data

Weight [g]	137.8
Housing	threaded type
Mounting	flush mountable
Dimensions [mm]	M18 x 1 / L = 38
Thread designation	M18 x 1
Materials	brass white bronze coated; PC

Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories

Items supplied	lock nuts: 2
----------------	--------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 2 m, PVC; 3 x 0.5 mm²

Connection

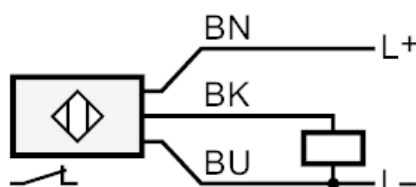

BN = brown
BU = blue
BK = black

Core colours :