




Inductive sensor

IOW2010-ARKG/0,15M/US/UP RT

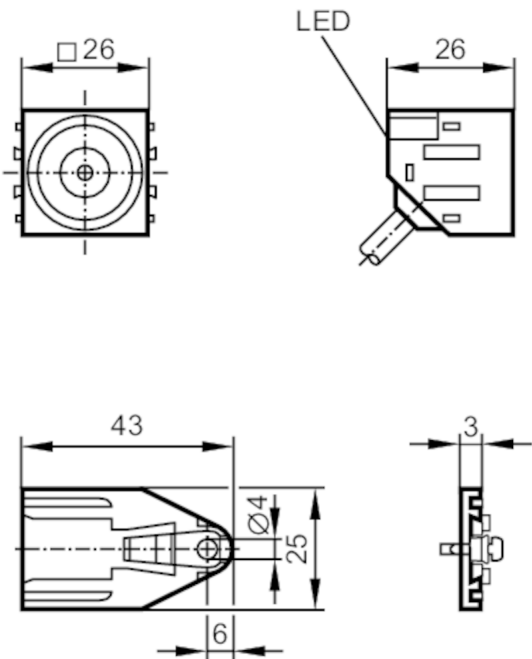

1 snap-fit mounting



| Product characteristics                         |      |               |
|-------------------------------------------------|------|---------------|
| Electrical design                               |      | PNP/NPN       |
| Output function                                 |      | normally open |
| Sensing range                                   | [mm] | 10            |
| Housing                                         |      | rectangular   |
| Dimensions                                      | [mm] | 26 x 26 x 26  |
| Electrical data                                 |      |               |
| Operating voltage                               | [V]  | 10...36 DC    |
| Protection class                                |      | II            |
| Reverse polarity protection                     |      | yes           |
| Outputs                                         |      |               |
| Electrical design                               |      | PNP/NPN       |
| Output function                                 |      | normally open |
| Max. voltage drop switching output DC           | [V]  | 4.6           |
| Minimum load current                            | [mA] | 2             |
| Max. leakage current                            | [mA] | 0.6           |
| Permanent current rating of switching output DC | [mA] | 100           |
| Switching frequency DC                          | [Hz] | 250           |
| Short-circuit protection                        |      | yes           |
| Type of short-circuit protection                |      | pulsed        |



## Inductive sensor

IOW2010-ARKG/0,15M/US/UP RT

|                     |     |
|---------------------|-----|
| Overload protection | yes |
|---------------------|-----|

## Detection zone

|                       |      |           |
|-----------------------|------|-----------|
| Sensing range         | [mm] | 10        |
| Real sensing range Sr | [mm] | 10 ± 10 % |
| Operating distance    | [mm] | 0...8.1   |

## Accuracy / deviations

|                    |                                                                             |          |
|--------------------|-----------------------------------------------------------------------------|----------|
| Correction factor  | steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3 |          |
| Hysteresis         | [% of Sr]                                                                   | 1...15   |
| Switch point drift | [% of Sr]                                                                   | -10...10 |

## Operating conditions

|                     |      |          |
|---------------------|------|----------|
| Ambient temperature | [°C] | -25...70 |
| Protection          |      | IP 67    |

## Tests / approvals

|      |              |         |
|------|--------------|---------|
| EMC  | EN 60947-5-2 |         |
|      | EN 55011     | class B |
| MTTF | [years]      | 2577    |

## Mechanical data

|            |      |                 |
|------------|------|-----------------|
| Weight     | [g]  | 61.12           |
| Housing    |      | rectangular     |
| Mounting   |      | flush mountable |
| Dimensions | [mm] | 26 x 26 x 26    |
| Materials  |      | PA              |

## Displays / operating elements

|         |                  |              |
|---------|------------------|--------------|
| Display | switching status | 1 x LED, red |
|---------|------------------|--------------|

## Accessories

|                |                             |
|----------------|-----------------------------|
| Items supplied | head cap screw: 1 x M4 x 12 |
|----------------|-----------------------------|

## Remarks

|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

## Electrical connection - plug

Cable: 0.15 m, PUR; 3 x 0.14 mm<sup>2</sup>

Connector: 1 x M12; coding: A



# IO5018



## Inductive sensor

IOW2010-ARKG/0,15M/US/UP RT

### Connection

