




Continuous level sensor (guided wave radar)

LR0000B-BR34AVPKG/US

For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher.

For 8-pole sockets the core colours are not standardised.
Please note the wiring of the sensor and the sockets (see data sheet).

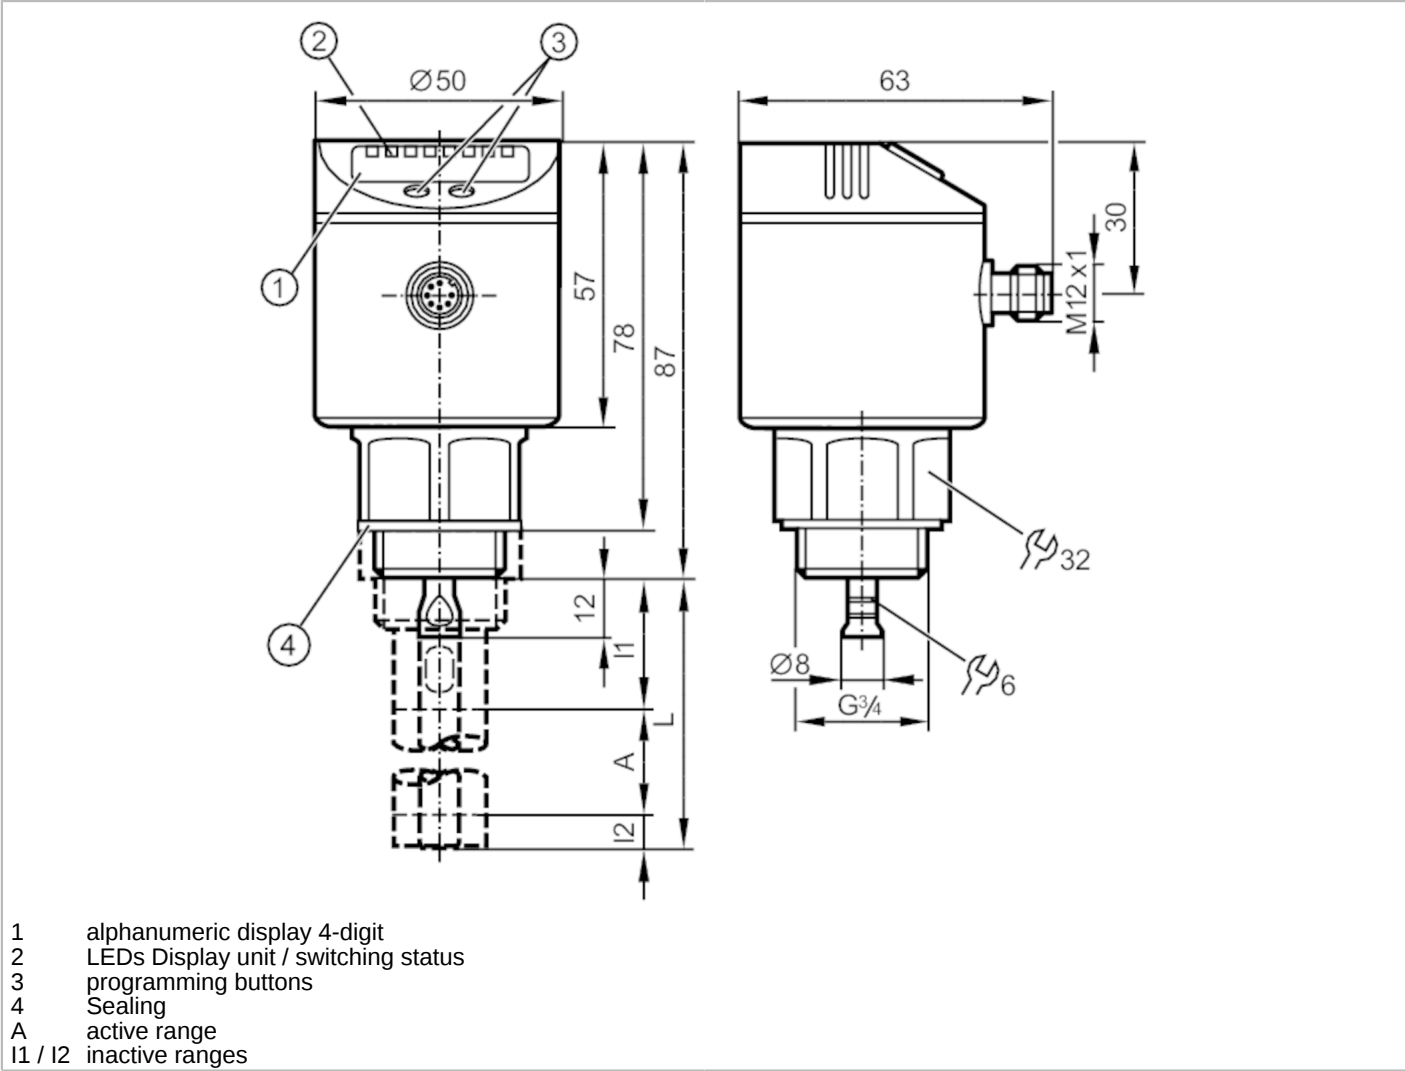

Product characteristics	
Number of inputs and outputs	Number of digital outputs: 4
Probe length L [mm]	100...1600
Process connection	threaded connection G 3/4 external thread
Application	
Special feature	Gold-plated contacts
Application	for industrial applications
Installation	Operation only in conjunction with rod and coaxial pipe.
Media	Liquids
Dielectric constant of the medium	≥ 2



Continuous level sensor (guided wave radar)

LR0000B-BR34AVPKG/US

Recommended media	water; hydrous media; hydrous coolants; oils; oil-based media	
Cannot be used for	See the operating instructions, chapter "Function and features".	
Process temperature [°C]	0...80; (see note under remarks)	
Pressure rating	4 bar	0.4 MPa
Vacuum resistance	-500 mbar	-0.05 MPa
Electrical data		
Operating voltage [V]	18...30 DC	
Current consumption [mA]	< 30	
Protection class	III	
Reverse polarity protection	yes	
Power-on delay time [s]	< 3	
Measuring principle	guided wave radar	
Inputs / outputs		
Number of inputs and outputs	Number of digital outputs: 4	
Outputs		
Total number of outputs	4	
Output signal	switching signal	
Electrical design	PNP	
Number of digital outputs	4	
Output function	normally open / normally closed; (parameterisable)	
Max. voltage drop switching output DC [V]	2.5	
Permanent current rating of switching output DC [mA]	200	
Short-circuit protection	yes	
Type of short-circuit protection	thermal, pulsed	
Overload protection	yes	
Measuring/setting range		
Probe length L [mm]	100...1600	
Active range A [mm]	L-40; (when set to oil and oil based media: L-60)	
Inactive range I1 / I2 [mm]	30 / 10; (when set to oil and oil based media: 30 / 30)	
Sampling rate [Hz]	4	
Setting range		
Set point SP [mm]	15...L-30	
Note on setpoint SP	when set to oil and oil based media: 35...L-30	
Reset point rP [mm]	10... L-35	
Note on reset point rP	when set to oil and oil based media: 30...L-35	
In steps of [mm]	5	
Hysteresis [mm]	> 5	
Overflow switch point OP [mm]	70...L-30	
Hysteresis, OP [mm]	10	
Accuracy / deviations		
Repeatability [mm]	± 5	
Measuring error [mm]	± 7	

LR8010



Continuous level sensor (guided wave radar)

LR0000B-BR34AVPKG/US

Offset error	[mm]	5
Resolution	[mm]	1
Temperature drift per 10 K		± 0.2 %

Interfaces

Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	no profile	
SIO mode	yes	
Required master port type	A	
Process data analogue	1	
Process data binary	4	
Min. process cycle time	[ms]	2.3
Supported DeviceIDs	Type of operation	DeviceID
	default	1250

Operating conditions

Ambient temperature	[°C]	0...60
Storage temperature	[°C]	-25...80
Protection		IP 67

Tests / approvals

Approval	WHG; General building authority approval; overflow prevention	
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	in a closed metal tank
	DIN EN 61000-6-4	in plastic or open metal tanks
Shock resistance	DIN EN 60068-2-27	50 g (11 ms) / 25 g (6 ms) with reference rod 0.5 m
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz) / 1 g (5...200 Hz) with reference rod 0.5 m
MTTF	[years]	198

Mechanical data

Weight	[g]	402
Dimensions	[mm]	Ø 50 / L = 99
Materials	stainless steel (316L/1.4404); stainless steel (304/1.4301); FKM; PBT; PC; PEI; TPE-V	
Materials (wetted parts)	sensor:: stainless steel (303/1.4305); stainless steel (316L/1.4435); PTFE; FKM; NBR reinforced fibre; Probe:: stainless steel (316L/1.4404); Coaxial pipe:: stainless steel (304/1.4301); stainless steel (316L/1.4404); stainless steel (301/1.4310); PPS reinforced fibre	
Process connection	threaded connection G 3/4 external thread	

Displays / operating elements

Display	Display unit	3 x LED, green
	switching status	4 x LED, yellow
	level	alphanumeric display, 4-digit
	parameter setting	alphanumeric display, 4-digit

LR8010



Continuous level sensor (guided wave radar)

LR0000B-BR34AVPKG/US


Remarks	
Notes	For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher.
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

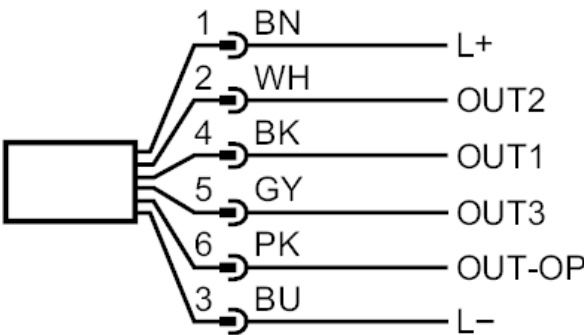

OUT1: IO-Link / switching output
OUT2: switching output
OUT3: switching output
OUT-OP: switching output overflow prevention

colours to DIN EN 60947-5-2

Core colours :

BN = brown
WH = white
BK = black
GY = grey
PK = pink
BU = blue

LR8010



Continuous level sensor (guided wave radar)

LR0000B-BR34AVPKG/US

Diagrams and graphs

Measurement deviation D at the limits of the active rod range

