


MQ2004



Magnetic sensor

MQ23005BFRKG/B/AM/IO/WFI/0,3M/ZH/US

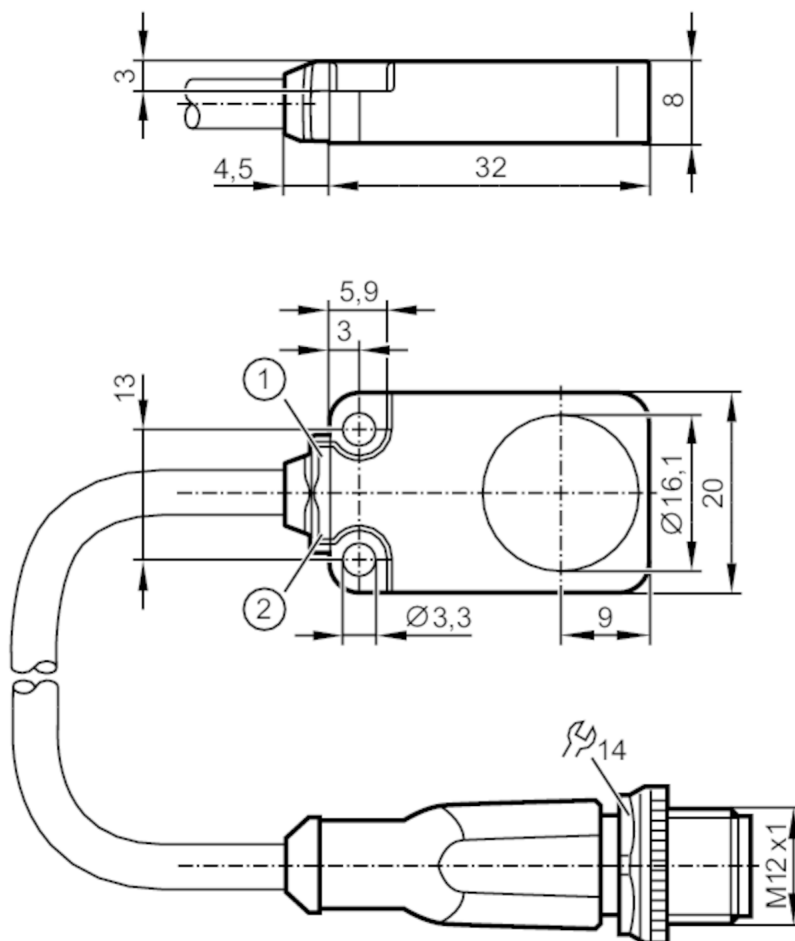

- 1 LED yellow
- 2 LED green



Product characteristics

Electrical design	PNP/NPN; (parameterisable)
Output function	normally open / normally closed; (parameterisable)
Sensing range [mm]	5
Communication interface	IO-Link
Housing	rectangular
Dimensions [mm]	20 x 8 x 32

Application

Special feature	anti-spatter
Media	ferrous only

Electrical data

Operating voltage [V]	10...30 DC
Rated insulation voltage [V]	60
Current consumption [mA]	< 30
Protection class	III
Reverse polarity protection	yes



Magnetic sensor

MQ23005BFRKG/B/AM/IO/WFI/0,3M/ZH/US

Power-on delay time	[s]	< 0.3	
Outputs			
Electrical design		PNP/NPN; (parameterisable)	
Output function		normally open / normally closed; (parameterisable)	
Max. voltage drop switching output DC	[V]	2.5	
Max. leakage current	[mA]	0.1	
Permanent current rating of switching output DC	[mA]	100	
Short-time current rating of switching output	[mA]	100	
Switching frequency DC	[Hz]	200	
Notes on switching frequency	[Hz]	suppression of extraneous fields: 10	
Short-circuit protection		yes	
Type of short-circuit protection		pulsed	
Overload protection		yes	
Detection zone			
Sensing range	[mm]	5	
Real sensing range Sr	[mm]	5 ± 10 %	
Operating distance	[mm]	0...4.05	
Accuracy / deviations			
Correction factor		steel: 1	
Hysteresis	[% of Sr]	< 10	
Switch point drift	[% of Sr]	-10...20	
Repeatability	[% of Sr]	10	
Software / programming			
Parameter setting options		hysteresis / window; switch-off delay; weld-field immunity; switch-on operations; Auto-teach	
Interfaces			
Communication interface		IO-Link	
Transmission type		COM2 (38,4 kBaud)	
IO-Link revision		1.1	
SDCI standard		IEC 61131-9 CDV	
Profiles		Smart Sensor: Identification and diagnosis; Multi-channel, two setpoint switching sensor, type 0 Generic Profiled Sensor; Teach Channel	
SIO mode		yes	
Required master port type		A	
Min. process cycle time	[ms]	9.6	
IO-Link process data (cyclical)	function	bit length	
	process value	16	
	device status	4	
	binary switching information	4	
IO-Link functions (acyclical)		application specific tag; operating hours counter; switching cycles counter	
Supported DeviceIDs	Type of operation	DeviceID	
	Default	829	
Note		For further information please see the IODD PDF file under "Downloads"	

MQ2004



Magnetic sensor

MQ23005BFRKG/B/AM/IO/WFI/0,3M/ZH/US

Operating conditions		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-30...85
Protection		IP 65; IP 67
Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B
Vibration resistance	EN 60068-2-6 Fc	20 g (10...3000 Hz) / 50 sweep cycles, 1 octave per minute, in 3 axes
Shock resistance	EN 60068-2-27 Ea	100 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes
Continuous shock resistance	EN 60068-2-27	40 g 6 ms; 4000 shocks each in every direction of the 3 coordinate axes
MTTF	[years]	1976
UL approval	Ta	-25...60 °C
	Enclosure type	Type 1
	power supply	Limited Voltage/Current
	UL Approval no.	C010
	File number UL	E174191
Mechanical data		
Weight	[g]	45
Housing		rectangular
Mounting		flush mountable
Dimensions	[mm]	20 x 8 x 32
Materials		diecast zinc anti-spatter; LED window: TPU; potting: PUR
Displays / operating elements		
Display	Display operation	1 x LED, green
	switching status	1 x LED, yellow
Remarks		
Pack quantity		1 pcs.

MQ2004





Magnetic sensor

MQ23005BFRKG/B/AM/IO/WFI/0,3M/ZH/US

Electrical connection

Cable: 0.3 m, PUR, Ø 4.9 mm; flame-retardant (IEC 60332-2, UL: FT2)

Connection

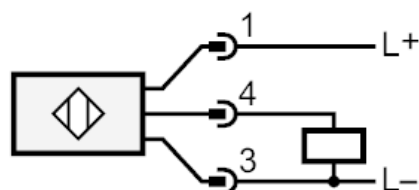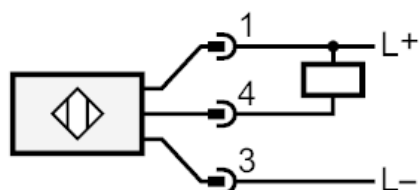

4 OUT / IO-Link

Connector: 1 x M12; coding: A; Locking: knurled nut, rotatable

