



Dial Gauge, Flat Back, ISO Type

Item number: 1041AB

Images



Description

Compact Type 1 and 3,5 mm Range Small Diameter - Metric


This is a compact, dial indicator with a bezel $\varnothing$ 40 mm. It offers you the following benefits:

- It is ideal for use in applications where space is limited.

Specification

Digital/Analog:	Analog
Inch-Metric:	Metric
Delivered:	With certificate of inspection
Range:	3.5 mm
Range per rev.:	0,5 mm
Dial reading:	0-25-0
Graduation:	0.01 mm
MPE any 1/10 revolution:	5 µm
MPE any 1/2 revolution:	8 µm
MPE any 1 revolution:	9 µm
MPE measuring range:	12 µm
H MPE (Hysteresis):	3 µm
R MPE (Repeatability):	3 µm
Measuring force:	0,4-1,4 N
Mass:	70 g
Stem:	8 mm
Contact point:	Carbide tipped, thread: M 2.5 x 0.45 mm
Balanced dial:	Yes
Double scale spacing:	Yes
Type:	EN ISO Standard

Dimensions

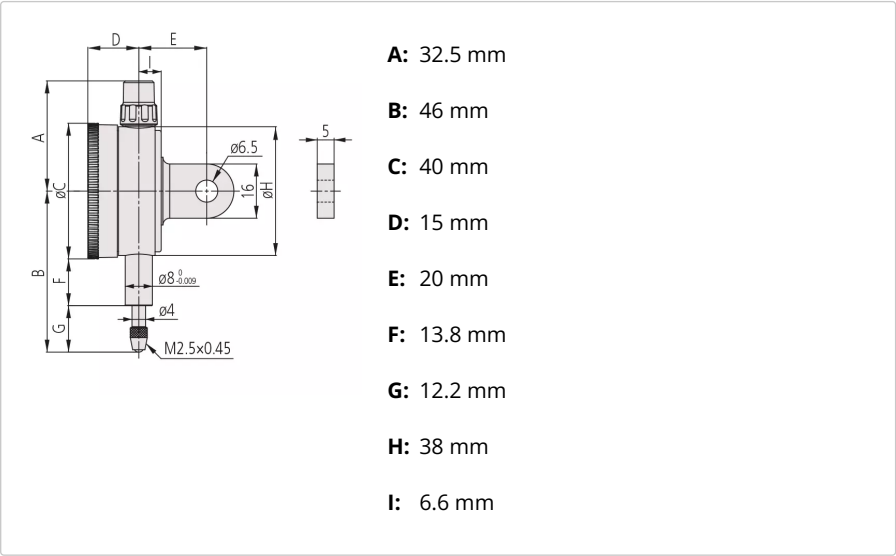

Accessories

Optional accessories:

**Limit Hands (Green) 2 pcs.**

Dial Indicator Series 1, Test Indicator
Art No. 21AAB363

**Bezel Clamp for Dial Gauge**

Series 1
Art No. 21RZA149

**Spindle Lifting Lever**

for S-Type and A-Type Serie 1
Art No. 902100
£8.20 ex. VAT

**Spindle Lifting Cable**

for Indicator, L=500mm
Art No. 21JZA295



Spindle Lifting Cable with Auto Stop

for Indicator, L=300mm
Art No. 21JZA301

Spare parts

Consumable spares:



Contact Element Ball Point, M2,5x0,45

7,3mm Length, Carbide, Metric
Art No. 901312
£7.70 ex. VAT