




Dial Gauge, ISO Type

Item number: 1160A

Images

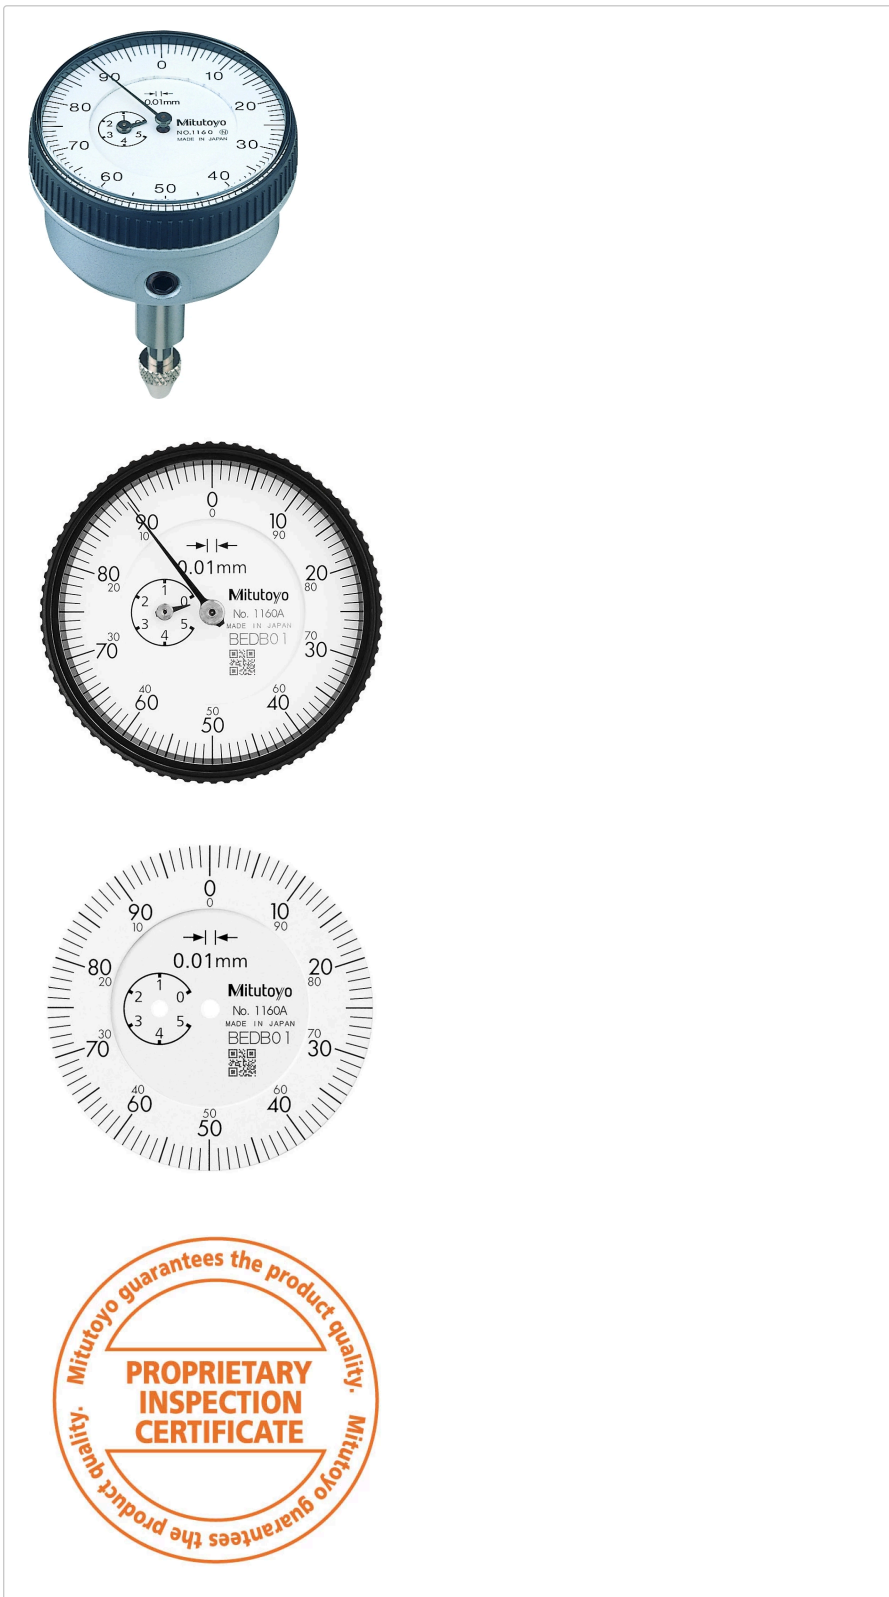

Description


This is a back plunger, dial indicator with bezel $\varnothing$ 40 mm. It offers you the following benefits:

- It is ideal for use in applications where space is limited.

Features

Digital/Analog:	Analog
Inch-Metric:	Metric
Type:	EN ISO Standard
Delivered:	With certificate of inspection
Range:	5 mm
Range per rev.:	1 mm
Dial reading:	±0-100
Graduation:	0.01 mm
MPE any 1/10 revolution:	7 µm
MPE any 1/2 revolution:	11 µm
MPE any 1 revolution:	12 µm
MPE measuring range:	18 µm
H MPE (Hysteresis):	4 µm
R MPE (Repeatability):	3 µm
Measuring force:	0,4-1,4 N
Mass:	80 g
Stem:	8 mm
Contact point:	Carbide tipped, thread: M 2.5 x 0.45 mm
Balanced dial:	Yes

Dimensions

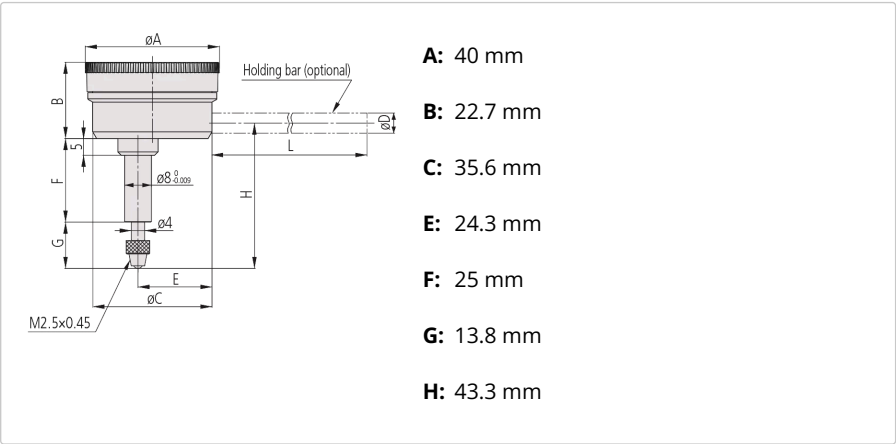

Accessories

Optional accessories:

**Limit Hands (Green) 2 pcs.**

Dial Indicator Series 1, Test Indicator

Art No. 21AAB363

Price on application

**Holding Bar for Back Plunger Indicator**

Ø 6 mm, 81 mm Length

Art No. 136567

Suggested retail price: 11.00 €*

**Holding Bar for Back Plunger Indicator**

Ø6,35mm, 81mm Length

Art No. 124625

Suggested retail price: 11.00 €*

Spare partsConsumable spares:

**Contact Element Ball Point,
M2,5x0,45**

8,3mm Length, Metric

Art No. 21AZA319

Suggested retail price: 17.00 €*
