



Dial Indicator, Back Plunger, AGD/ANSI

Item number: 1166T

Images



Description


This is a back plunger, dial indicator with bezel $\varnothing$ 40 mm. It offers you the following benefits:

- It is ideal for use in applications where space is limited.

Specification

Digital/Analog:	Analog
Inch-Metric:	Inch
Functions:	ANSI/AGD type
Type:	ANSI/AGD Standard
Delivered:	With certificate of inspection, limit indicators
Range:	0,2" "
Range per rev.:	0.2"
Graduation:	0,001"
H MPE (Hysteresis):	0,00033"
R MPE (Repeatability):	±0,0002"
MPE first one revolution:	±0,001"
MPE first 2 1/2 revolutions:	±0,001"
MPE > 2 1/2-10 revolutions:	±0,001"
Mass:	80 g
Stem:	9.52 mm / 0.375"
Contact point:	Carbide tipped, thread: 4-48UNF

Dimensions

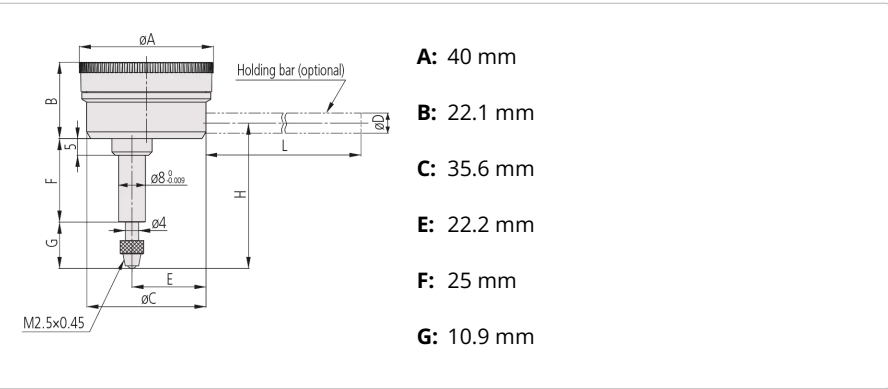

Accessories

Optional accessories:



Holding Bar for Back Plunger Indicator

Ø 8 mm, 42 mm Length
Art No. 21AAA168
£3.40 ex. VAT



Holding Bar for Back Plunger Indicator

Ø 6,35mm, 42mm Length
Art No. 21AAA167
£3.40 ex. VAT



Holding Bar for Back Plunger Indicator

Ø 6 mm, 42 mm Length
Art No. 21AAA166
£3.40 ex. VAT



Holding Bar for Back Plunger Indicator

Ø 8 mm, 81 mm Length
Art No. 136568
£3.40 ex. VAT



Holding Bar for Back Plunger Indicator

Ø 6 mm, 81 mm Length
Art No. 136567
£3.40 ex. VAT



Holding Bar for Back Plunger Indicator

Ø6,35mm, 81mm Length
Art No. 124625
£3.40 ex. VAT

Spare parts

Consumable spares:



Contact Element Ball Point, M2,5x0,45

8,3mm Length, Metric
Art No. 21AZA319
£4.10 ex. VAT