



Dial Gauge, ANSI/AGD Type

Item number: 1167A

Images



Description

This is a back plunger, dial indicator with bezel $\varnothing$ 40 mm. It offers you the following benefits:


- It is ideal for use in applications where space is limited.

Specification

Digital/Analog:	Analog
Inch-Metric:	Inch
Type:	ANSI/AGD Standard
Delivered:	With certificate of inspection
Range:	0,2 "
Range per rev.:	0.05"
Dial reading:	0-25-0
Graduation:	0.001"
H MPE (Hysteresis):	0,00033"
R MPE (Repeatability):	$\pm$ 0,0002"
MPE first one revolution:	$\pm$ 0,001"
MPE first 2 1/2 revolutions:	$\pm$ 0,001"
MPE > 2 1/2-10 revolutions:	$\pm$ 0,001"

Measuring force:	0,4-1,4 N
Mass:	80 g
Stem:	9.52 mm / 0.375"
Contact point:	Carbide tipped, thread: 4-48UNF

Dimensions

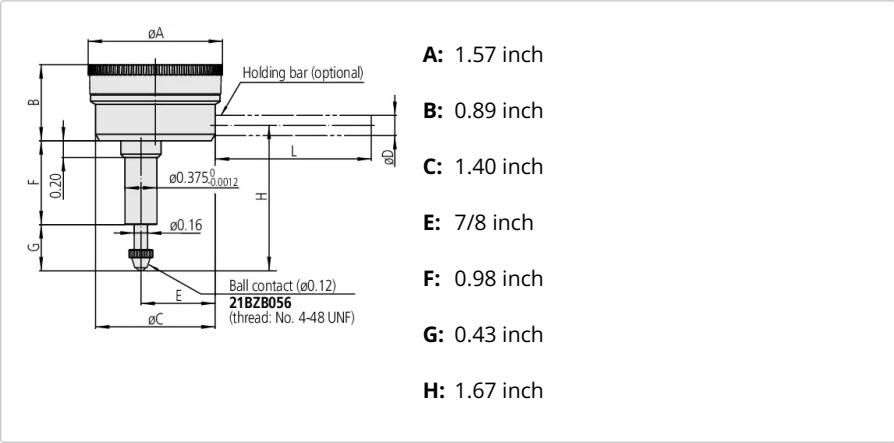

Accessories

Optional accessories:



Holding Bar for Back Plunger Indicator

Ø 8 mm, 81 mm Length
Art No. 136568
£3.40 ex. VAT



Limit Hands (Green) 2 pcs.

Dial Indicator Series 1, Test Indicator
Art No. 21AAB363



Holding Bar for Back Plunger Indicator

Ø 6 mm, 42 mm Length
Art No. 21AAA166
£3.40 ex. VAT



Holding Bar for Back Plunger Indicator

Ø 6 mm, 81 mm Length
Art No. 136567
£3.40 ex. VAT



Holding Bar for Back Plunger Indicator

Ø6,35mm, 81mm Length
Art No. 124625
£3.40 ex. VAT




Holding Bar for Back Plunger Indicator

Ø6,35mm, 42mm Length
Art No. 21AAA167
£3.40 ex. VAT



Holding Bar for Back Plunger Indicator

Ø 8 mm, 42 mm Length
Art No. 21AAA168
£3.40 ex. VAT

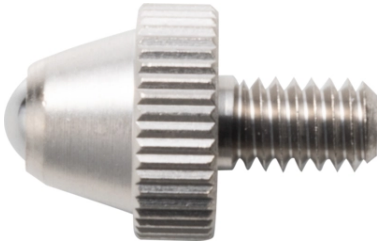Spare parts**Consumable spares:****Contact Element Ball Point, 4-48UNF**

1/4" Length, Carbide, Inch

Art No. 21BZB056

£4.10 ex. VAT