




Dial Indicator, Flat Back, One Revol.

Item number: 1900SB-72

Images

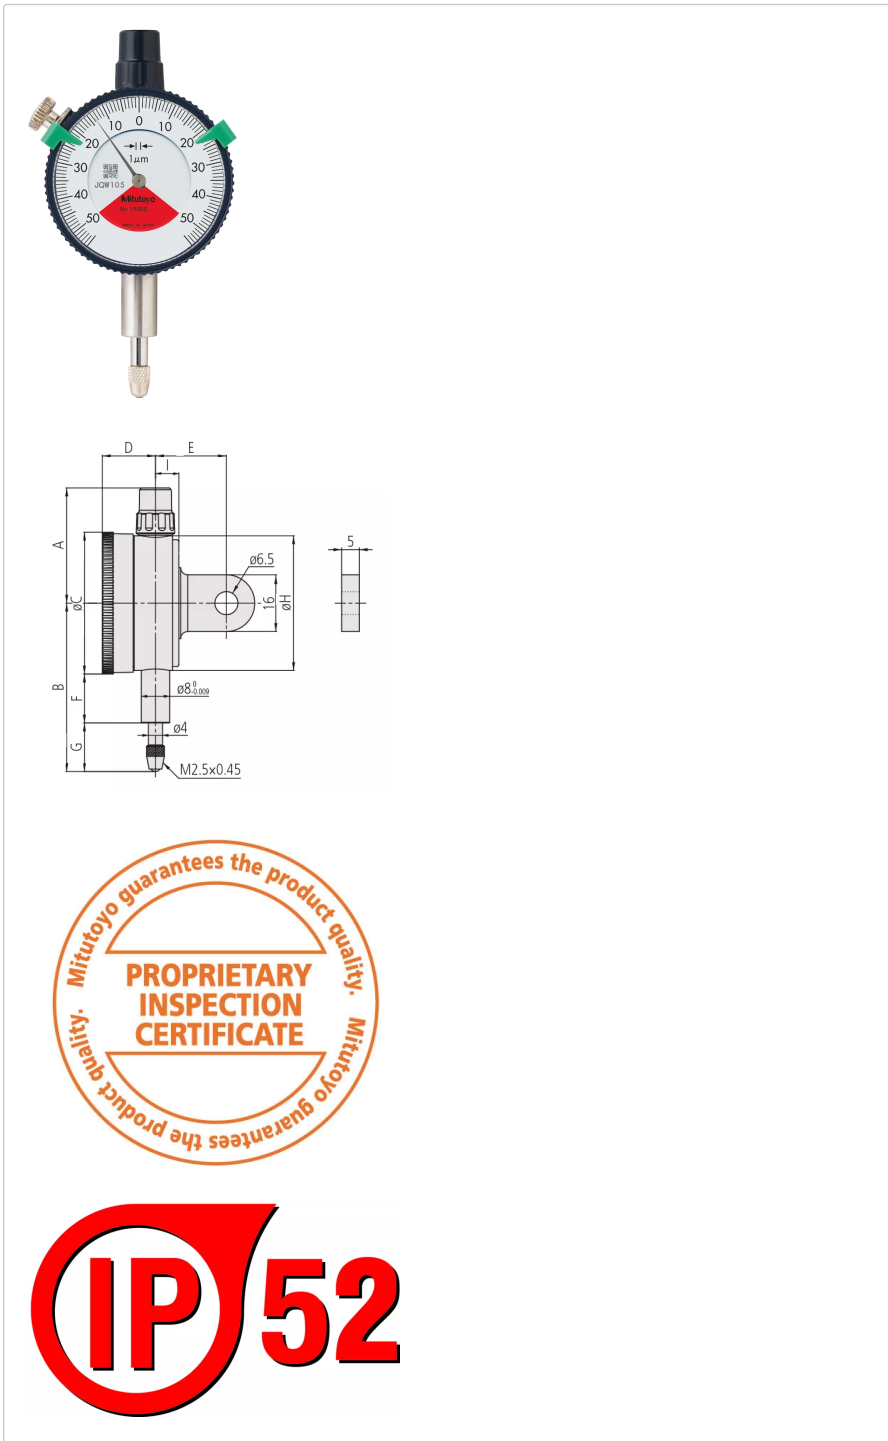

Description

This is a compact, metric dial indicator. It offers you the following benefits:

- It eliminates the possibility of reading errors due to miscounting multiple revolutions.


Specification

Digital/Analog:

Analog

Inch-Metric:	Metric
Functions:	ISO type
Delivered:	with certificate of inspection, limit indicators
Range:	0.1 mm
Plunger Stroke:	2 mm
Range per rev.:	0.14 mm
Graduation:	0.001 mm
MPE any 1/10 revolution:	2 µm
MPE measuring range:	4 µm
H MPE (Hysteresis):	2 µm
R MPE (Repeatability):	1 µm
Mass:	75 g
Stem:	8 mm
Contact point:	Carbide tipped, thread: M 2.5 x 0.45 mm

Dimensions

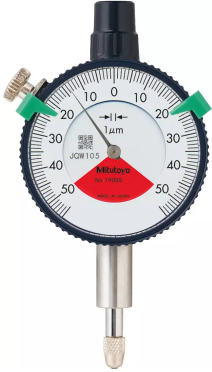

A: 32.5 mm

B: 53.5 mm

C: 40 mm

D: 14.5 mm

E: 20 mm

F: 16.8 mm

G: 16.7 mm

I: 6.6 mm

I: 6.6 mm

Accessories

Optional accessories:

**Limit Hands (Green) 2 pcs.**

Dial Indicator Series 1, Test Indicator
Art No. 21AAB363

**Bezel Clamp for Dial Gauge**

Series 1
Art No. 21RZA149

**Spindle Lifting Lever**

for S-Type and A-Type Serie 1
Art No. 902100
£8.20 ex. VAT

**Spindle Lifting Cable**

for Indicator, L=500mm
Art No. 21JZA295

**Spindle Lifting Cable with Auto Stop**

for Indicator, L=300mm
Art No. 21JZA301

Spare parts**Consumable spares:****Contact Element Ball Point,
M2,5x0,45**

7,3mm Length, Carbide, Metric

Art No. 901312

£7.70 ex. VAT