



CRYSTA-Apex V122010

Item number: 191-485

Images



Accuracy

Probe configuration	Probe	SP50M	MPP110Q ¹⁾	SPR ¹⁾	TP200
Module	—	DMCS-1	—	—	STANDARD-FORCE
Style (mm)	—	ø4×50	ø4×18	ø4×50	ø4×10
Length measurement error (L mm) [μm]	—	2.3 + 3L/1000	2.3 + 3L/1000	2.3 + 3L/1000	2.3 + 3L/1000
Length measurement error (L mm) [μm]	—	2.3 + 3L/1000	2.3 + 3L/1000	2.3 + 3L/1000	2.3 + 3L/1000
Length measurement error (L mm) [μm]	—	2.3 + 3L/1000	2.3 + 3L/1000	2.3 + 3L/1000	2.3 + 3L/1000
Repeatability (L mm) [μm]	—	1.9	1.9	1.9	1.9
Scanning mode form error on sphere (P mm) [μm]	—	2.3	2.3	2.5	—
Scanning mode form error on sphere (P mm) [μm]	—	50	50	50	—
Single stylus form error (P mm) [μm]	—	2.0	2.0	2.2	—

Testing and evaluation methods for form, function and force are as per ISO 10360-2:2009 (S 8 7440-2, 739 3).
Testing and evaluation methods for P mm, P mm and P mm are as per ISO 10360-5:2020 (S 8 7440-5, 739 3).
L = Measuring length (mm).
1) Available by custom order only. *2) See below table for temperature environments 1 and 2.


Temperature environment

Accuracy guaranteed conditions	Temperature environment 1	Temperature environment 2
Temperature range	18 to 25 °C	18 to 25 °C
Rate of change	2 °C per hour	2 °C per hour
Gradient	1 °C per meter	1 °C per meter

External dimensions/Measuring table clamping hole arrangement

CRYSTA-Apex V1200 Series

Unit: mm




CRYSTA-Apex V121210

CRYSTA-Apex V122010

CRYSTA-Apex V123010

Model	CRYSTA-Apex V121210	CRYSTA-Apex V122010	CRYSTA-Apex V123010
L	1200	1200	3000
B	1000	1000	1000
A	2000	1000	6000
H	100	100	100
C	450	375	375

1) Not shown in this figure.
2) Not shown in this figure.

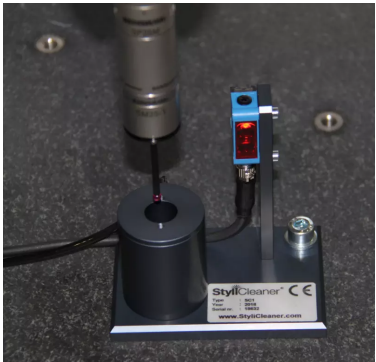

Description

The CRYSTA-Apex V1200, 1600 & 2000 series offers you up to 12,8m³ measuring volume and still keeps an excellent 4,5 µm accuracy or better.

This series is developed for supporting quality evaluation of volumetric parts. This high performance, cost effective coordinate measuring machine, designed and constructed according to Mitutoyo's extensive experience in CNC CMM technology.

Ready for touch trigger probe, scanning probe, optical probe and laser scanner probe.

Main benefits:

- Proven lightweight bridge-type construction with high rigidity air-bearings on every axis
- High accuracy, high speed and high acceleration
- Temperature sensors for compensation of machine and workpiece from 16° to 24°C and monitoring of the environmental temperature.
- ABS linear scales provide high environmental resistance and saves time at start-up as homing is not necessary
- UC480 controller supporting Multi-sensor and SMS functionality (Smart Measuring System)

Specification

Model:	CRYSTA-Apex V122010
Model:	CRYSTA-Apex V122010
Range:	1200 x 2000 x 1000 mm
Accuracy:	E0, MPE from: (2,3+0,3L/100) µm
Max. drive speed:	6
Model:	CRYSTA-Apex V122010
Loading Weight:	2,500 kg
Loading Height:	1,000 mm
Digital step:	0.1 µm