






Dial Gauge, Flat Back, ISO Type

Item number: 1913AB-10

Images





Description

Compact Type, Extra Small Diameter - Metric


This is a compact, dial indicator with a bezel $\varnothing$ 31 / 36 mm. It offers you the following benefits:

- It is ideal for use in applications where space is limited.

Specification

Digital/Analog:	Analog
Inch-Metric:	Metric
Delivered:	With certificate of inspection
Range:	0.5 mm
Range per rev.:	0,2 mm
Dial reading:	0-100-0
Graduation:	0.002 mm
MPE any 1/10 revolution:	2.5 μ m
MPE any 1/2 revolution:	4.5 μ m
MPE any 1 revolution:	5 μ m
MPE measuring range:	6 μ m
H MPE (Hysteresis):	2.5 μ m
R MPE (Repeatability):	1 μ m
Measuring force:	0,3-1,8 N
Mass:	51 g
Stem:	8 mm
Contact point:	Carbide tipped, thread: M 2.5 x 0.45 mm
Balanced dial:	Yes
Type:	EN ISO Standard

Dimensions

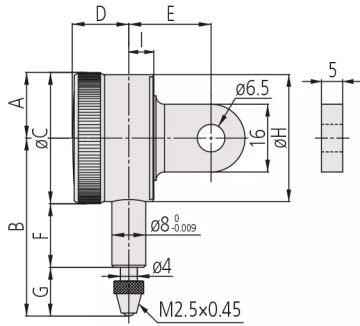**A:** 15.5 mm**B:** 39.4 mm**C:** 31 mm**D:** 12.7 mm**E:** 19.4 mm**F:** 15.1 mm**G:** 8.9 mm**H:** 30 mm**I:** 6 mm

Spare parts

Consumable spares:



Contact Element Ball Point, M2,5x0,45

8,3mm Length, Metric

Art No. 21AZA319

£4.10 ex. VAT