




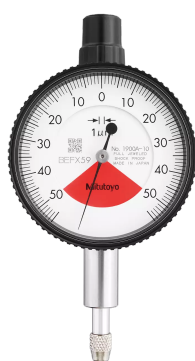

Dial Gauge, Flat Back, ISO Type

Item number: 1929AB-62

Images

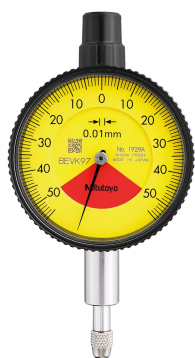

Description

This is a compact, metric dial indicator. It offers you the following benefits:

- It eliminates the possibility of reading errors due to miscounting multiple revolutions.

Specification

Digital/Analog:	Analog
Inch-Metric:	Metric
Type:	EN ISO Standard
Delivered:	With certificate of inspection
Range:	1 mm
Plunger Stroke:	3.5 mm
Range per rev.:	1,4 mm
Dial reading:	50-0-50
Graduation:	0.01 mm
MPE any 1/10 revolution:	5 µm
MPE measuring range:	9 µm
H MPE (Hysteresis):	3 µm
R MPE (Repeatability):	3 µm
Measuring force:	0,4-1,4 N
Mass:	70 g
Stem:	8 mm
Contact point:	Carbide tipped, thread: M 2.5 x 0.45 mm
Balanced dial:	Yes
One revolution:	Yes
Shockproof:	Yes

Accessories

Optional accessories:



Limit Hands (Green) 2 pcs.

Dial Indicator Series 1, Test Indicator
Art No. 21AAB363



Bezel Clamp for Dial Gauge

Series 1
Art No. 21RZA149



Spindle Lifting Lever

for S-Type and A-Type Serie 1
Art No. 902100
£8.20 ex. VAT



Spindle Lifting Cable

for Indicator, L=500mm
Art No. 21JZA295



Spindle Lifting Cable with Auto Stop

for Indicator, L=300mm
Art No. 21JZA301

Spare parts

Consumable spares:



**Contact Element Ball Point,
M2,5x0,45**

7,3mm Length, Carbide, Metric

Art No. 901312

£7.70 ex. VAT