


Dial Gauge, Lug Back, ISO Type

Item number: 2044A

Images

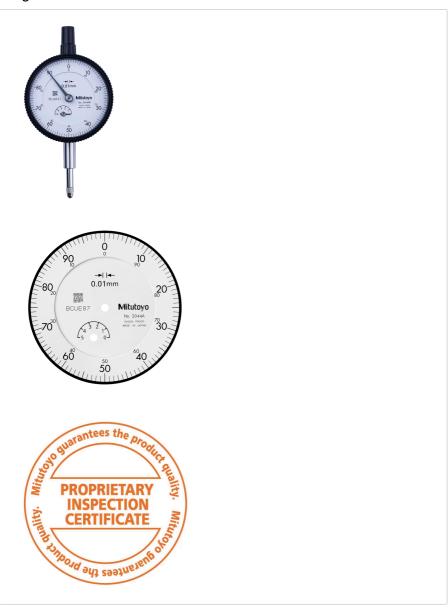

Description

Standard Type, 5 mm Range, 0,01 mm Graduation

This is a standard dial indicator. It offers you the following benefits:


- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed and removed without tools.
- No through screw holes on the frame and secure adhesion between the bezel and the crystal as well as the use of an O-ring prevents water or oil penetration.

Features

Inch-Metric: Metric Type: EN ISO Standard	Digital/Analog:	Analog
	Inch-Metric:	Metric
	Туре:	EN ISO Standard
Delivered: With certificate of inspection	Delivered:	With certificate of inspection

Range:	5 mm
Range per rev.:	1 mm
Dial reading:	±0-100
Graduation:	0.01 mm
MPE any 1/10 revolution:	5 µm
MPE any 1/2 revolution:	9 µm
MPE any 1 revolution:	10 μm
MPE measuring range:	12 μm
H MPE (Hysteresis):	3 µm
R MPE (Repeatability):	3 µm
Measuring force:	0,4-1,4 N
Mass:	145 g
Stem:	8 mm
Contact point:	Carbide tipped, thread: M 2.5 x 0.45 mm
Continuous dial:	Yes

Dimensions

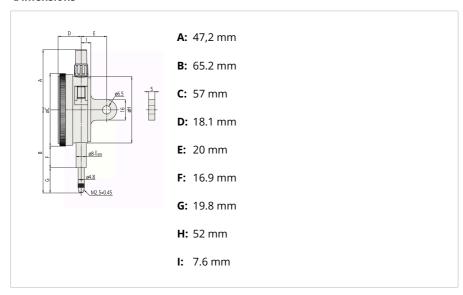

Accessories

Optional accessories:



Limit Hands (green) 2pcs

Dial Indicator Series 2/3/4 Art No. 21AZB195 Price on application



Bezel Clamp for Dial Gauge

Metric, Series 2/3/4 Art No. 21AZB148 Price on application



Spindle Lifting Lever

for Digital Indicator, A-Type Dial Indicator Serie 2/3/4 Art No. 21EZA198 Price on application



Spindle Lifting Cable

for Indicator, L=500mm Art No. 21JZA295 Price on application



Spindle Lifting Cable with Auto Stop

for Indicator, L=300mm Art No. 21JZA301 Price on application SHOW LESS

Spare parts

