





Dial Gauge, Flat Back, ISO Type

Item number: 2050AB

Images

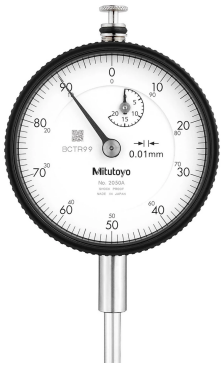

Description

Standard Type, 20 mm Range, 0,01 mm Graduation


This is a standard dial indicator. It offers you the following benefits:

- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed and removed without tools.
- No through screw holes on the frame and secure adhesion between the bezel and the crystal as well as the use of an O-ring prevents water or oil penetration.


Specification

Digital/Analog:	Analog
Inch-Metric:	Metric
Type:	EN ISO Standard
Delivered:	With certificate of inspection
Range:	20 mm
Range per rev.:	1 mm
Dial reading:	±0-100
Graduation:	0.01 mm
MPE any 1/10 revolution:	6 µm
MPE any 1/2 revolution:	10 µm
MPE any 1 revolution:	11 µm
MPE measuring range:	20 µm
H MPE (Hysteresis):	4 µm
R MPE (Repeatability):	3.0 µm
Measuring force:	0,4-2 N
Mass:	140 g
Stem:	8.0 mm
Contact point:	Carbide tipped, thread: M 2.5 x 0.45 mm
Continuous dial:	Yes
Cushioned end point:	Yes

Dimensions



- A: 38.5 mm
- B: 75.2 mm
- C: 57 mm
- D: 18.1 mm
- E: 20 mm
- F: 16.9 mm
- G: 29.8 mm
- H: 52 mm
- I: 7.6 mm



- A: 38.5 mm
- B: 75.2 mm
- C: 57 mm
- D: 18.1 mm
- E: 20 mm
- F: 16.9 mm
- G: 29.8 mm
- H: 52 mm
- I: 7.6 mm

Accessories

Optional accessories:



Limit Hands (green) 2pcs

Dial Indicator Series 2/3/4
Art No. 21AZB195



Bezel Clamp for Dial Gauge

Metric, Series 2/3/4
Art No. 21AZB148



Spindle Lifting Lever

for S and A-Type Serie 2,3 >10/0,4" up to
20mm/0,8"
Art No. 21AZB150
£4.40 ex. VAT

Spare parts

Consumable spares:



Contact Element Ball Point, M2,5x0,45

7,3mm Length, Carbide, Metric
Art No. 901312
£7.70 ex. VAT