




Dial Indicator, Flat Back, AGD/ANSI

Item number: 2802SB-10

Images

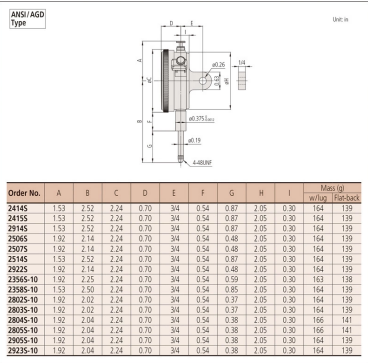

2802SB-10

AGD/ANSI

Type

1.53 2.52 2.24 0.70 3/4 0.54 0.87 2.05 0.30 164 139

2414S 1.53 2.52 2.24 0.70 3/4 0.54 0.87 2.05 0.30 164 139

2414S 1.53 2.52 2.24 0.70 3/4 0.54 0.87 2.05 0.30 164 139

2508S 1.92 2.14 2.24 0.70 3/4 0.54 0.48 2.05 0.30 164 139

2509S 1.92 2.14 2.24 0.70 3/4 0.54 0.48 2.05 0.30 164 139

2514S 1.53 2.52 2.24 0.70 3/4 0.54 0.87 2.05 0.30 164 139

2522S 1.92 2.14 2.24 0.70 3/4 0.54 0.48 2.05 0.30 164 139

2565S-10 1.92 2.25 2.24 0.70 3/4 0.54 0.59 2.05 0.30 163 138

2585S-10 1.53 2.50 2.24 0.70 3/4 0.54 0.85 2.05 0.30 164 139

2802S-10 1.92 2.02 2.24 0.70 3/4 0.54 0.37 2.05 0.30 164 139

2803S-10 1.92 2.02 2.24 0.70 3/4 0.54 0.37 2.05 0.30 164 139

2804S-10 1.92 2.04 2.24 0.70 3/4 0.54 0.38 2.05 0.30 166 141

2805S-10 1.92 2.04 2.24 0.70 3/4 0.54 0.38 2.05 0.30 166 141

2905S-10 1.92 2.04 2.24 0.70 3/4 0.54 0.38 2.05 0.30 164 139

2923S-10 1.92 2.04 2.24 0.70 3/4 0.54 0.38 2.05 0.30 164 139

Mitutoyo guarantees the product quality.

PROPRIETARY INSPECTION CERTIFICATE

Mitutoyo guarantees the product quality.

Description

Standard Type, Various Ranges, 0,0001" Graduation - Inch

This is a standard, inch dial indicator. It offers you the following benefits:

- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed and removed without tools.
- No through screw holes on the frame and secure adhesion between the bezel and the crystal as well as the use of an O-ring prevents water or oil penetration.

Specification

Digital/Analog:	Analog
Inch-Metric:	Inch
Functions:	ANSI/AGD type
Delivered:	With certificate of inspection, limit indicators
Range:	0,025" "
Range per rev.:	0.01"
Graduation:	0,0001"
H MPE (Hysteresis):	0,0001"
R MPE (Repeatability):	±0,00003"
MPE first one revolution:	±0,0001"
MPE first 2 1/2 revolutions:	±0,0001"
Type:	ANSI/AGD Standard
Mass:	139 g
Stem:	9.52 mm / 0.375"
Contact point:	Carbide tipped, thread: 4.0-48.0UNF
Continuous dial:	Yes
Shockproof:	Yes

Dimensions

A: 48.8 mm

B: 51.4 mm

C: 57 mm

D: 17.7 mm

E: 19 mm

F: 13.6 mm

G: 9.3 mm

I: 7.6 mm

I: 7.6 mm

Spare parts

Consumable spares:

**Contact Element Ball Point, 4-48UNF**

1/4" Length, Carbide, Inch
Art No. 21BZB005

£8.60 ex. VAT