




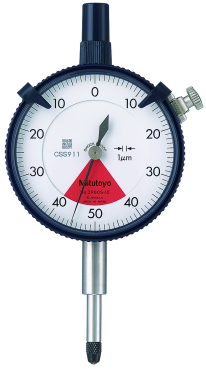

Dial Indicator, Lug Back, One Revolution

Item number: 2900SB-72

Images

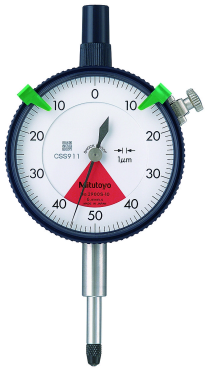

Description

Graduation 0,001 mm

This is a one revolution dial indicator. It offers you the following benefits:

- Bezel clamp and lifting lever (optional) can be attached to either right or left side.
- No through screw holes on the frame as well as the use of an O-ring prevents water or oil penetration.
- It eliminates the possibility of reading errors due to miscounting multiple revolutions.

Specification

Digital/Analog:	Analog
Inch-Metric:	Metric
Functions:	ISO type
Delivered:	With certificate of inspection, limit indicators
Range:	0.08 mm
Plunger Stroke:	4.5 mm
Range per rev.:	0.1 mm
Graduation:	0.001 mm
MPE any 1/10 revolution:	2 µm
MPE measuring range:	3 µm
H MPE (Hysteresis):	2 µm
R MPE (Repeatability):	1 µm
Mass:	140 g
Stem:	8 mm
Contact point:	Carbide tipped, thread: M 2.5 x 0.45 mm
One revolution:	Yes
Shockproof:	Yes

Accessories

Optional accessories:



Limit Hands (green) 2pcs

Dial Indicator Series 2/3/4
Art No. 21AZB195



Bezel Clamp for Dial Gauge

Metric, Series 2/3/4
Art No. 21AZB148



Spindle Lifting Lever

for Digital Indicator, A-Type Dial Indicator
Serie 2/3/4
Art No. 21EZA198
£7.70 ex. VAT



Spindle Lifting Cable

for Indicator, L=500mm
Art No. 21JZA295



Spindle Lifting Cable with Auto Stop

for Indicator, L=300mm
Art No. 21JZA301

Spare parts

Consumable spares:



Contact Element Ball Point, M2,5x0,45

7,3mm Length, Carbide, Metric
Art No. 901312
£7.70 ex. VAT



NBR Rubber Boot

Digital Gauge ID-B, Dial Gauge IP63/IP64
Art No. 21AAB562