






Dial Gauge, Flat Back, ANSI/AGD Type

Item number: 2910AB-10

Images

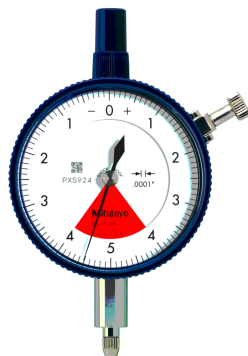

Description


One Revolution Type for Error-free Reading

- Light weight type / standard type
- Limiting pointer rotation to one revolution eliminates the reading errors that can occur with dial indicators featuring more than one revolution of the pointer for full stroke.

Specification

Digital/Analog:	Analog
Inch-Metric:	Inch
Delivered:	With certificate of inspection, bezel clamp
Range:	0,008 "
Plunger Stroke:	2.2 mm
Range per rev.:	0,01"
Dial reading:	4.0-0.0-4.0
Graduation:	0,0001"
H MPE (Hysteresis):	0,0001"
R MPE (Repeatability):	±0,00003"
MPE first one revolution:	±0,0001"
Type:	ANSI/AGD Standard
Measuring force:	0,4-1,8 N
Mass:	138 g
Stem:	9.52 mm / 0.375"
Contact point:	Carbide tipped, thread: 4.0-48.0UNF
One revolution:	Yes
Cushioned end point:	Yes
Shockproof:	Yes

Dimensions



A: 1.86 inch

B: 2.02 inch

C: 2.24 inch

D: 0.71 inch

E: 3/4 inch

F: 0.54 inch

G: 0.36 inch

H: 2.05 inch

I: 0.30 inch

Accessories

Optional accessories:**Limit Hands (green) 2pcs**

Dial Indicator Series 2/3/4
Art No. 21AZB195

**Spindle Lifting Lever**

for Digital Indicator, A-Type Dial Indicator
Serie 2/3/4
Art No. 21EZA198
£7.70 ex. VAT

**Spindle Lifting Cable**

for Indicator, L=500mm
Art No. 21JZA295

**Spindle Lifting Cable with Auto Stop**

for Indicator, L=300mm
Art No. 21JZA301

Standard accessories:



Bezel Clamp for Dial Gauge

Inch, Series 2/3/4
Art No. 21RZA065
£2.30 ex. VAT

Spare parts

Consumable spares:



Contact Element Ball Point, 4-48UNF

1/4" Length, Carbide, Inch
Art No. 21BZB005
£8.60 ex. VAT