






Dial Indicator, Lug Back, AGD/ANSI

Item number: 2910S-10

Images

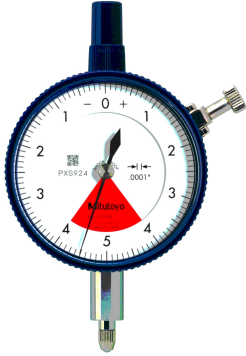

Description


One Revolution Type for Error-free Reading

- Light weight type / standard type
- Limiting pointer rotation to one revolution eliminates the reading errors that can occur with dial indicators featuring more than one revolution of the pointer for full stroke.

Specification

Digital/Analog:	Analog
Inch-Metric:	Inch
Delivered:	With certificate of inspection, bezel clamp, limit hands
Range:	0,008 "
Plunger Stroke:	2.2 mm
Range per rev.:	0,01"
Dial reading:	4.0-0.0-4.0
Graduation:	0,0001"
H MPE (Hysteresis):	0,0001"
R MPE (Repeatability):	±0,00003"
MPE first one revolution:	±0,0001"
Type:	ANSI/AGD Standard
Measuring force:	0,4-1,8 N
Mass:	163 g
Stem:	9.52 mm / 0.375"
Contact point:	Carbide tipped, thread: 4.0-48.0UNF
One revolution:	Yes
Cushioned end point:	Yes
Shockproof:	Yes

Dimensions



A: 48.8 mm

B: 51.2 mm

C: 57 mm

D: 17.7 mm

E: 19 mm

F: 13.6 mm

G: 9.1 mm

I: 7.6 mm

Spare parts

Consumable spares:

**Contact Element Ball Point, 4-48UNF**

1/4" Length, Carbide, Inch
Art No. 21BZB005

£8.60 ex. VAT
