



Dial Gauge, Lug Back,  
ANSI/AGD Type

Item number: 2923A-10

Images



Description

**Standard Type, Various Ranges, 0,0001" Graduation - Inch**

This is a standard, inch dial indicator. It offers you the following benefits:


- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed and removed without tools.
- No through screw holes on the frame and secure adhesion between the bezel and the crystal as well as the use of an O-ring prevents water or oil penetration.

Specification

Digital/Analog:	Analog
Inch-Metric:	Inch
Functions:	ANSI/AGD type
Delivered:	With certificate of inspection, bezel clamp
Range:	0,05" "
Range per rev.:	0.01"
Dial reading:	0.0-5.0-0.0
Graduation:	0,0001"
H MPE (Hysteresis):	0,0001"
R MPE (Repeatability):	±0,00003"
Measuring force:	0,4-2
MPE first one revolution:	±0,0001"

MPE first 2 1/2 revolutions:	±0,0001"
MPE > 2 1/2-10 revolutions:	±0,0002"
Type:	ANSI/AGD Standard
Mass:	164 g
Stem:	9.52 mm / 0.375"
Contact point:	Carbide tipped, thread: 4.0-48.0UNF
Balanced dial:	Yes
Continuous dial:	Yes
Reverse reading:	Yes 3
Shockproof:	Yes


Dimensions

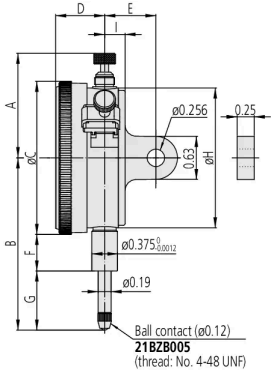

**A:** 1.86 inch  
**B:** 2.04 inch  
**C:** 2.24 inch  
**D:** 0.71 inch  
**E:** 3/4 inch  
**F:** 0.54 inch  
**G:** 0.38 inch  
**H:** 2.05 inch  
**I:** 0.3 inch

Accessories

Optional accessories:



**Limit Hands (green) 2pcs**  
Dial Indicator Series 2/3/4  
Art No. 21AZB195



### Spindle Lifting Lever

for Digital Indicator, A-Type Dial Indicator  
Serie 2/3/4

Art No. 21EZA198

£7.70 ex. VAT



### Spindle Lifting Cable

for Indicator, L=500mm

Art No. 21JZA295



### Spindle Lifting Cable with Auto Stop

for Indicator, L=300mm

Art No. 21JZA301

#### Standard accessories:



### Bezel Clamp for Dial Gauge

Inch, Series 2/3/4

Art No. 21RZA065

£2.30 ex. VAT

#### Spare parts

##### Consumable spares:



### **Contact Element Ball Point, 4-48UNF**

1/4" Length, Carbide, Inch

Art No. 21BZB005

**£8.60** ex. VAT