





Dial Gauge, Lug Back, ISO Type

Item number: 2929A

Images

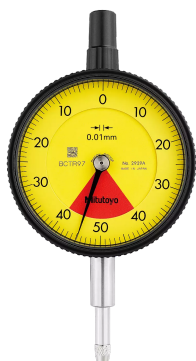

Description

Graduation 0,01 / 0,1 mm


This is a one revolution dial indicator. It offers you the following benefits:

- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed without tools.
- No through screw holes on the frame and secure adhesion between the bezel and the crystal as well as the use of an O-ring prevents water or oil penetration.

Specification

Digital/Analog:	Analog
Inch-Metric:	Metric
Type:	EN ISO Standard
Delivered:	With certificate of inspection
Range:	0.8 mm
Plunger Stroke:	5 mm
Range per rev.:	1 mm
Dial reading:	40.0-0.0-40.0
Graduation:	0.01 mm
MPE any 1/10 revolution:	5 µm
MPE measuring range:	7 µm
H MPE (Hysteresis):	3 µm
R MPE (Repeatability):	3.0 µm
Measuring force:	0,4-1,4 N
Mass:	145 g
Stem:	8.0 mm
Contact point:	Carbide tipped, thread: M 2.5 x 0.45 mm
One revolution:	Yes
Shockproof:	Yes

Dimensions



A: 47.2 mm

B: 65.2 mm

C: 57 mm

D: 18.1 mm

E: 20 mm

F: 16.9 mm

G: 19.8 mm

H: 52 mm

I: 7.6 mm

Accessories**Optional accessories:****Limit Hands (green) 2pcs**

Dial Indicator Series 2/3/4
Art No. 21AZB195

**Bezel Clamp for Dial Gauge**

Metric, Series 2/3/4
Art No. 21AZB148

**Spindle Lifting Lever**

for Digital Indicator, A-Type Dial Indicator
Serie 2/3/4
Art No. 21EZA198
£7.70 ex. VAT

**Spindle Lifting Cable**

for Indicator, L=500mm
Art No. 21JZA295



Spindle Lifting Cable with Auto Stop

for Indicator, L=300mm
Art No. 21JZA301

Spare parts

Consumable spares:



Contact Element Ball Point, M2,5x0,45

7,3mm Length, Carbide, Metric
Art No. 901312
£7.70 ex. VAT