





Dial Indicator, Flat Back, AGD/ANSI

Item number: 2976TB

Images



Description


One Revolution Type for Error-free Reading

- Light weight type / standard type
- Limiting pointer rotation to one revolution eliminates the reading errors that can occur with dial indicators featuring more than one revolution of the pointer for full stroke.

Specification

Digital/Analog:	Analog
Inch-Metric:	Inch
Delivered:	With certificate of inspection, bezel clamp, limit hands
Range:	0,02" (plunger stroke: 0,14")
Range per rev.:	0,02"
Dial reading:	10.0-0.0-10.0
Graduation:	0,0005"
H MPE (Hysteresis):	0,00016"
R MPE (Repeatability):	±0,0001"
MPE first one revolution:	±0,0005"
Type:	ANSI/AGD Standard
Measuring force:	0,4-1,4 N
Mass:	75 g
Stem:	9.52 mm / 0.375"
Contact point:	Carbide tipped, thread: 4.0-48.0UNF

Dimensions

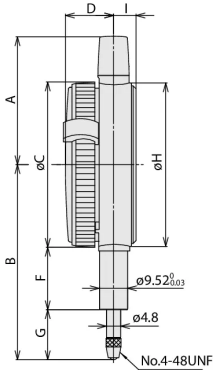

A: 43.2 mm

B: 64.7 mm

C: 57 mm

D: 16.5 mm

F: 20.3 mm

G: 15.9 mm

I: 7.6 mm

Spare parts

Consumable spares:



Contact Element Ball Point, 4-48UNF

1/4" Length, Carbide, Inch

Art No. 21BZB005

£8.60 ex. VAT